

Sounds divider




BENNIC COMPONENTS

| IATF 16949 | ISO 14001 | ISO 9001 | IMDS ID:38606 |



TERMINALS , BINDING POST

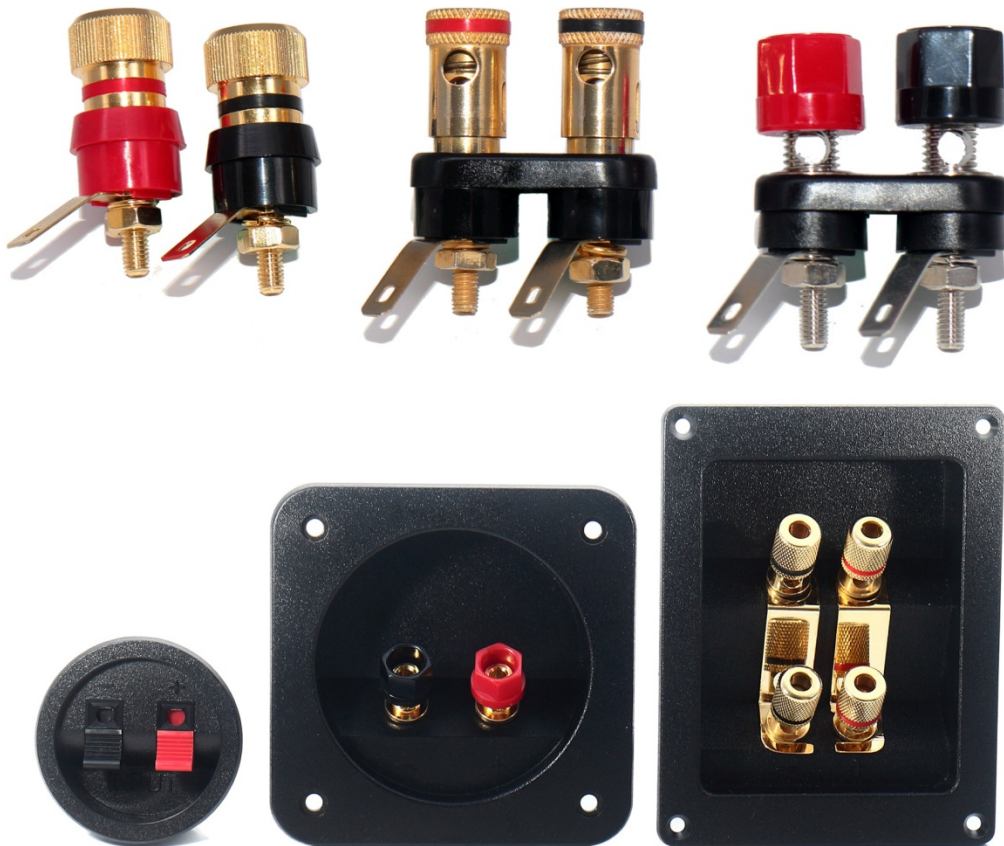

V.2018.03

BENNIC AND COMPANY

TEL : +886 2 2765 4485

FAX : +886 2 2763 6054

E-mail : mail@bennic.com.tw



www.bennic.com.tw

<http://www.bennic.com.tw>



TERMINALS , BINDING POST
I N D E X

SERIES	DESCRIPTION	PAGE
BP-09	PLASTIC CAP BINDING POSTS	2
BP-10	PLASTIC CAP BINDING POSTS	3
BP-11, 12,13	COPPER UNSCREW CAP SOLID BINDING POST	4-5
BP16	FULLY TRANSPARENT INSULATION - MEET CE'S REGULATION,	6
BP17	PUSH & RELEASE LOCKED - PREVENT WIRE LOOSEN ON VIBRATION	7
BP22	PUSH & RELEASE LOCKED - PREVENT WIRE LOOSEN ON VIBRATION	8
BP18,19,21	COPPER CAP SOLID BINDING POST	9-10
BP18U, 19U,21U	"U" TYPE COPPER CAP SOLID BINDING POST	11-12
BP30	3 WAY INPUT COPPER CAP BINDING POST	13
SP-02	SPEAKER TERMINALS	14
PUSH TERMINALS	STANDARD TYPE	15
TPT-21, TPT-22	4WAYS PUSH TYPE TERMINALS	16
RPT-15	ROUND TYPE - STANDARD SIZE (O.D. 105mm) TERMINALS	17
RPT-16	ROUND TYPE - SIZE (O.D. 80mm) TERMINALS	18
RPT-17	ROUND TYPE - MEDIUM SIZE (O.D. 75mm) TERMINALS	19
SPT-10	SQUARE SHARP ROUND BOWL TERMINALS 80 x 80mm	20
SPT-11	SQUARE SHARP ROUND BOWL TERMINALS 57 x 57mm	21
SPT-15	SQUARE SHARP ROUND BOWL TERMINALS 98 x 98mm	22
SPT-16	SQUARE SHARP ROUND BOWL TERMINALS 80 x 80mm	23
TPT-10	RECTANGLE SHARP TERMINALS SIZE 80 x 94mm	24
TPT-15	RECTANGLE SHARP TERMINALS SIZE 92 x 110mm	25
RPT-26	BI-WIRING ROUND TYPE SIZE (O.D. 132mm)	26
SPT-26	BI-WIRING SQUARE TYPE SIZE 116 x 116mm	27
TPT-20	BI-WIRING RECTANGLE SIZE 93 x 120mm	28
TPT-25	BI-WIRING RECTANGLE SIZE 92 x 110mm	29
TPT-30	TRI-WIRING RECTANGLE SIZE 100 x 140mm	30
PIN JACK	PIN JACK	31

**BINDING POST :BP-09 SERIES (PLASTIC CAP)****FEATURES:** BRASS, 2 WAYS INPUT - 4mm BANANA PLUG & 4mm CABLE ENTRY HOLE

P / N (ORDER) CODE	DIGIT :	1	2	3	4	5	6	7	8	9	0
P / N :	BP09	G	-	A	4	20	D	-	I	G	B
P / N :	BP09	N	-	-	4	10	-	-	-	-	R

DIGIT 1: BENNIC'S BP-09 BINDING POST SERIES - PLASTIC CAP**DIGIT 2:** PLATING - "G": 18K GOLD PLATING, "N": NICKEL PLATING**DIGIT 3:** "A" - WITH BRASS INSERT FEMALE THREAD

NIL - PLASTIC-SELF FEMALE THREAD

DIGIT 4: THREAD SIZE OF POST (AS MARKED "M" ON SKETCH)

"4" - M4 x 0.70 THREAD "5" - M5 x 0.8 THREAD

DIGIT 5: THREAD LENGTH OF POST (AS MARKED "L" ON SKETCH)

"10"-10mm, "15" - 15mm, "20" - 20mm, "30" - 30mm

DIGIT 6: "D" - WITH "D CUT" ON THE POST (FIG. 2)

NIL - W/O D CUT

DIGIT 7: "T" - WITH "TURRET" ON THE END OF POST (FIG. 3)

NIL - MEANS W/O TURRED

DIGIT 8: "I" - W/I SINGLE INSULATOR KITS, M4 POST ONLY (FIG. 4)

"P" - W/I DUAL INSULATOR KITS, M4 POST ONLY (FIG. 5)

NIL W/O INSULATOR KITS

TO FIT INSULATOR. POST ONLY M4, LENGTH MIN 20mm. D CUT ASKED.

DIGIT 9: "G" - GOLD PLATING HARDWARES (SOLDER TAG. NUT & WASHER)


NIL - NICKEL PLATING HARDWARES

DIGIT 0: COLOR OF INDEX, "R" RED, "B" BLACK

STANDARD (POPULAR) OF POSTS: 410, 420D, 530.

IF ORDER FOR NON-STANDARD POST, REQUEST MIN. ORDER 10,000PCS.

** TAGS STANDARD SIZE #205, OPTION FOR #110, #187 OR #250

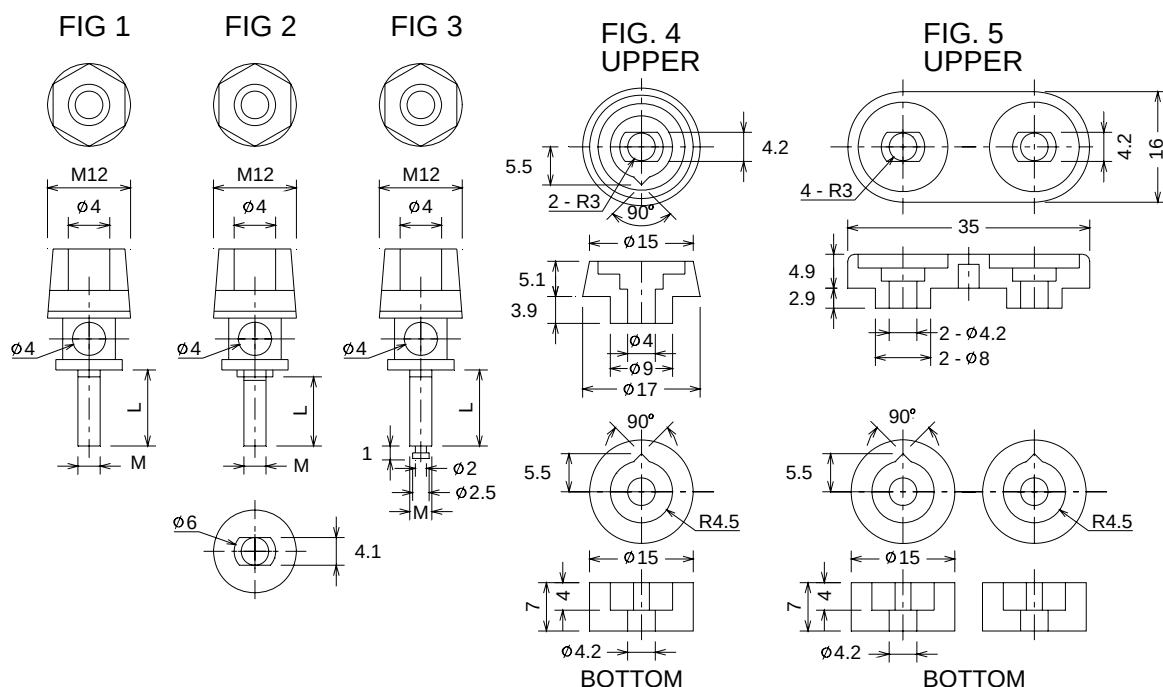

**BINDING POST: BP-10 SERIES (PLASTIC CAP)**

FEATURES: BRASS, 2 WAYS INPUT - 4mm BANANA PLUG & 5mm CABLE ENTRY HOLE.

P / N (ORDER) CODE	DIGIT :	1	2	3	4	5	6	7	8	9	0
P / N :	BP10	G	-	A	4	20	D	-	I	G	B
P / N :	BP10	N	-	-	4	10	-	-	-	-	R

DIGIT 1: BENNIC'S BP-10 BINDING POST SERIES - PLASTIC CAP

DIGIT 2: PLATING - "G": 18K GOLD PLATING, "N": NICKEL PLATING

DIGIT 3: "A" - WITH BRASS INSERT FEMALE THREAD

NIL - PLASTIC-SELF FEMALE THREAD

DIGIT 4: THREAD SIZE OF POST (AS MARKED "M" ON SKETCH)

"4" - M4 x 0.70 THREAD "5" - M5 x 0.8 THREAD

DIGIT 5: THREAD LENGTH OF POST (AS MARKED "L" ON SKETCH)

"10" - 10mm, "15" - 15mm, "20" - 20mm, "30" - 30mm

DIGIT 6: "D" - WITH "D CUT" ON THE POST (FIG. 2)

NIL - W/O D CUT

DIGIT 7: "T" - WITH "TURRET" ON THE END OF POST (FIG. 3)

NIL - MEANS W/O TURRED

DIGIT 8: "I" - W/I SINGLE INSULATOR KITS, M4 POST ONLY (FIG. 4)

"P" - W/I DUAL INSULATOR KITS, M4 POST ONLY (FIG. 5)

NIL W/O INSULATOR KITS

TO FIT INSULATOR. POST ONLY M4, LENGTH MIN 20mm. D CUT ASKED.

DIGIT 9: "G" - GOLD PLATING HARDWARES (SOLDER TAG, NUT & WASHER)


NIL - NICKEL PLATING HARDWARES

DIGIT 0: COLOR OF INDEX, "R" RED, "B" BLACK

STANDARD (POPULAR) OF POSTS: 410, 420D, 530.

IF ORDER FOR NON-STANDARD POST, REQUEST MIN. ORDER 10,000PCS.

** TAGS STANDARD SIZE #205, OPTION FOR #110, #187 OR #250

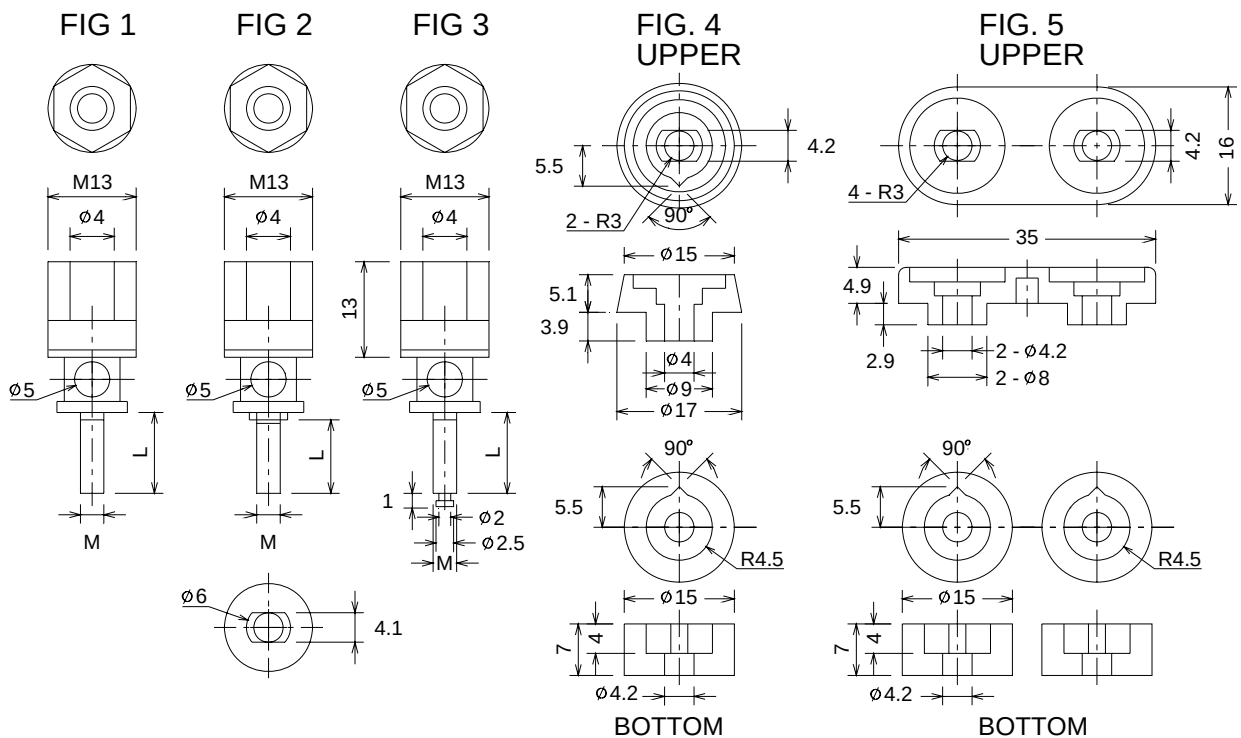

**BINDING POST: BP-11. BP-12 & BP-13 SERIES**

FEATURES : BRASS, 2 WAYS INPUT - BANANA PLUG & 5mm CABLE ENTRY HOLE
(UNSCREW CAP TYPE)

P / N (ORDER) CODE	DIGIT :	1	2	3	4	5	6	7	8	9	0
P / N :	BP11	N	-	R	4	10	-	-	-	G	B
P / N :	BP12	G	-	H	4	20	-	-	-	-	B
P / N :	BP13	G	-	R	5	30	D	T	P	-	R

DIGIT 1: BENNIC'S SOLID BINDING POST MODEL NUMBER

"BP11" (FIG. 1) - DIA 12mm ROUND HEAD, DIAMOND KNURL

"BP12" (FIG. 2) - DIA 14mm ROUND HEAD, LINE KNURL

"BP13" (FIG. 3) - HEX 13mm HEX HEAD, PLAIN SURFACE

DIGIT 2: PLATING - "G": 18K GOLD PLATING, "N": NICKEL PLATING**DIGIT 3: CANDLE RING SHARP - "R": ROUND (FIG. 4), "H": HAXAGON****DIGIT 4: THREAD SIZE OF POST (AS MARKED "M" ON SKETCH)**

"4" - M4 x 0.70 THREAD "5" - M5 x 0.8 THREAD

DIGIT 5: THREAD LENGTH OF POST (AS MARKED "L" ON SKETCH)

"10" - 10mm, "15" - 15mm, "20" - 20mm, "30" - 30mm

DIGIT 6: "D" - WITH "D CUT" ON THE POST (FIG. 5)

NIL -W/O D CUT

DIGIT 7: "T" - WITH "TURRET" ON THE END OF POST (FIG. 6)

NIL - MEANS W/O TURRED

DIGIT 8: "I" - W/I SINGLE INSULATOR KITS, M4 POST ONLY (FIG. 7)

"P" - W/I DUAL INSULATOR KITS, M4 POST ONLY (FIG. 8)

NIL W/O INSULATOR KITS

TO FIT INSULATOR. POST ONLY M4, LENGTH MIN 20mm. D CUT ASKED.

DIGIT 9: "G" - GOLD PLATING HARDWARES (SOLDER TAG. NUT & WASHER)

NIL - NICKEL PLATING HARDWARES




DIGIT 0: COLOR OF INDEX, "R" RED, "B" BLACK

STANDARD (POPULAR) OF POSTS: R410, R410T, R420D, R530,

IF ORDER FOR NON-STANDARD POST, REQUEST MIN. ORDER 10,000PCS.

** TAGS STANDARD SIZE #205, OPTION FOR #110, #187 OR #250


** PLEASE SEE NEXT PAGE FOR ALL FIGURES (SKETCHS)

BP -11**BP -12****BP -13**




BINDING POST: BP-11. BP-12 & BP-13 SERIES

SKETCH / FIGURE (in mm) TOL. ± 1.0 mm

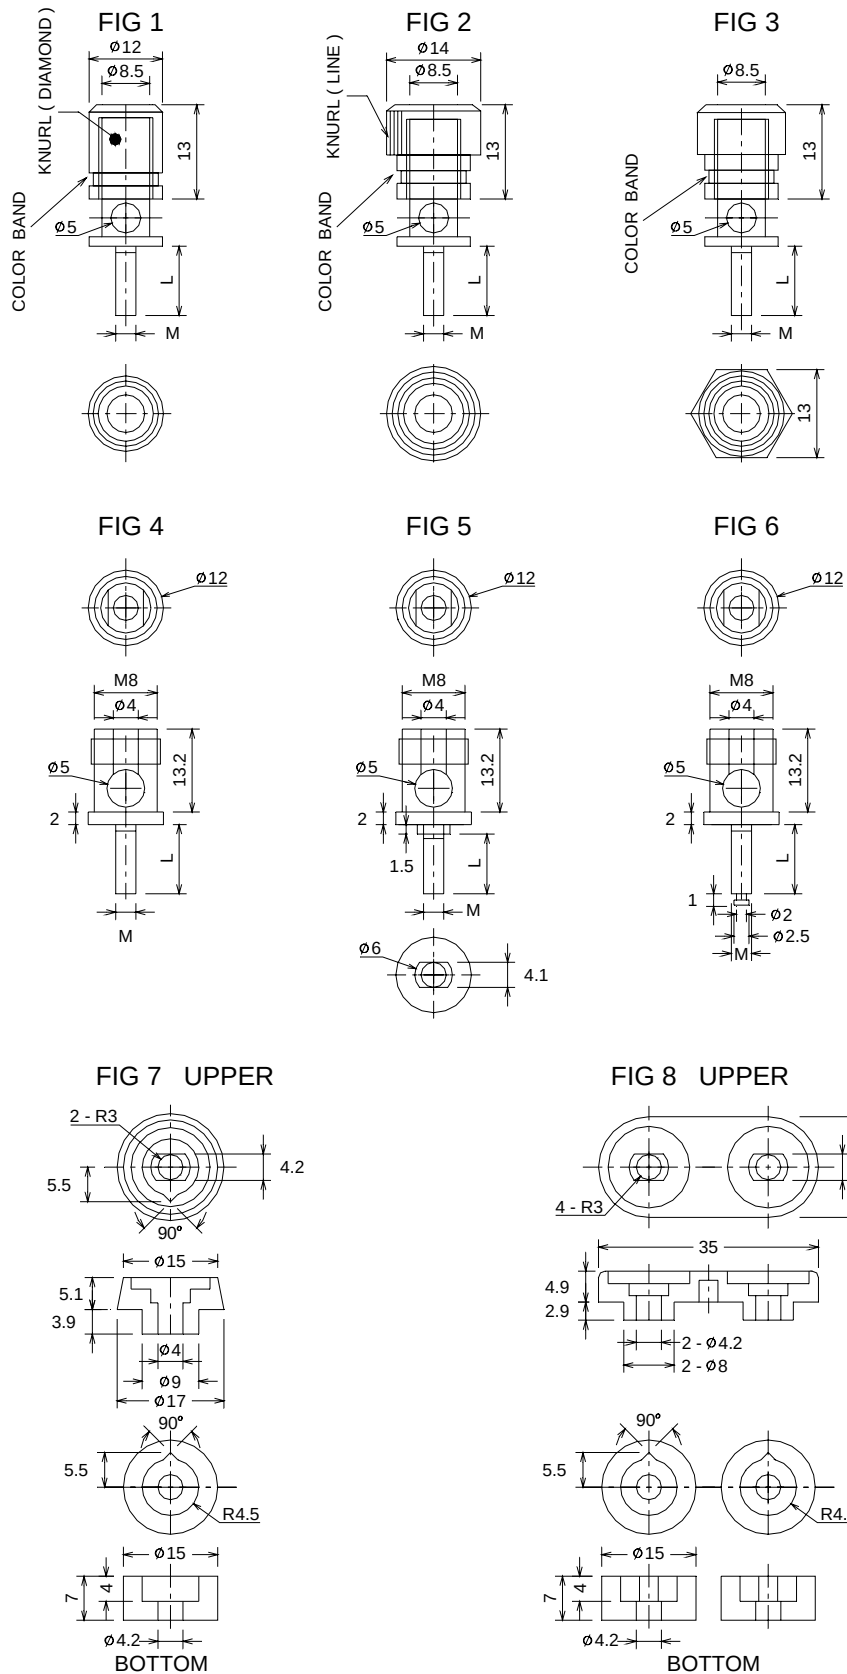



FEATURES: SOLID BRASS, FULLY TRANSPARENT INSULATION - MEET CE'S REGULATION. ,
5mm CABLE ENTRY HOLE & OPTION 4mm BANANA INPUT HOLE.

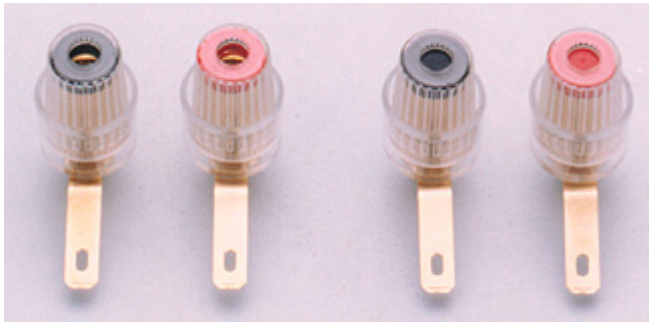

P / N (ORDER) CODE	DIGIT :	1	2	3	4	5	6	7	8	9	0
P / N :	BP16	G	-	4	10	-	-	-	G		R
P / N :	BP16	G	-	4	20	D	T	P	G		R
P / N :	BP16	G	-	4	25	D	T	-	N	S	B

DIGIT 1: BP16 - BENNIC BINDING POST BP-16 SERIES

DIGIT 2: PLATING - "G": 18K GOLD PLATING, "N": NICKEL PLATING

DIGIT 3: THREAD SIZE OF POST (AS MARKED "M" ON SKETCH)

"4" - M4 x 0.70 THREAD "5" - M5 x 0.8 THREAD

DIGIT 4: THREAD LENGTH OF POST (AS MARKED "L" ON SKETCH)

"10" - 10mm, "15" - 15mm, "20" - 20mm, "30" - 30mm

DIGIT 5: "D" - WITH "D CUT" ON THE POST

NIL -W/O D CUT

DIGIT 6: "T" - WITH "TURRET" ON THE END OF POST (FIG. 6)

NIL - MEANS W/O TURRED

DIGIT 7: "I" - W/I SINGLE INSULATOR KITS, M4 POST ONLY (FIG. 7)

"P" - W/I DUAL INSULATOR KITS, M4 POST ONLY (FIG. 8)

NIL W/O INSULATOR KITS

* TO FIT INSULATOR. POST ONLY M4, LENGTH MIN 20mm. D CUT ASKED.

DIGIT 8: "G" - GOLD PLATING HARDWARES (NUT, WASHER & SOLDER TAGS)

NIL - NICKEL PLATED HARDWARES (NUT, WASHER & SOLDER TAGS)

* STANDARD TAG SIZE IS #205 (OPTION FOR #110, #187 OR 250)

DIGIT 9: "S" - W/I PLASTIC PLUG TO CLOSED BANANA PLUG INPUT HOLE

NIL - WITH 4mm BANANA PLUG INPUT HOLE

DIGIT 0: COLOR OF INDEX, "R" RED, "B" BLACK

STANDARD (POPULAR) OF POSTS: 410, 420D, 525. , STANDARD COLOR: RED & BLACK

(IF ORDER FOR NON-STANDARD POST OR COLOR UPON DISCUSS, ALSO ASK MOQ 10,000PCS)

** FOR THE DETAILS OF MARKED "M" OR "L" OR "T" OR "I" OR "P" - KINDLY REFER

TO OUR PREVIOUS "BP-10" OR "BP-18/19/21" SERIES PAGE.

**SOLID BINDING POST: BP-17 SERIES**

FEATURES: ** PUSH & RELEASE LOCKED TYPE - PREVENT WIRE LOOSEN ON VIBRATION
 ** 2 WAYS INPUT - 4mm BANANA PLUG & 4mm CABLE ENTRY HOLE

P / N (ORDER) CODE	DIGIT :	1	2	3	4	5	6	7	8	9	
P / N :		BP17	G	-	4	20	D	T	I	G	B

DIGIT 1: BENNIC'S SOLID BINDING POST BP17 SERIES

SEE FIG. 1 - UPPER FIGURE IS PUSHED. , BOTTOM FIGURE IS RELEASED

DIGIT 2: PLATING - "G": 18K GOLD PLATING, "N": NICKEL PLATING**DIGIT 3: MALE THREAD SIZE OF POST (AS MARKED "M" ON FIG 3, 4, 5)**

"4" - M4 x 0.70 THREAD "5" - M5 x 0.8 THREAD

DIGIT 4: MALE THREAD LENGTH OF POST (AS MARKED "L" ON FIG 3, 4, 5)

"10" - 10mm, "20" - 20mm, "30" - 30mm

** IF DIGIT 3/4 AT 000 - MEANS NO MALE POST, BUT WITH FEMALE NUT (M4X0.7)
 (AS FIG. 2) - FOR HI-END RAW SPEAKER UNIT USE

DIGIT 5: "D" - WITH "D CUT- ON THE POST (FIG. 4)

NIL - W/O D CUT

DIGIT 6: "T" - WITH "TURRET" ON THE POST (FIG. 5)

NIL -W/O TURRET

DIGIT 7: "I" -W/I SINGLE INSULATOR KITS, M4 POST ONLY (FIG. 6)

"P" -W/I DUAL INSULATOR KITS, M4 POST ONLY (FIG. 7)

NIL W/O INSULATOR KITS

TO FIT INSULATOR. POST ONLY M4, LENGTH MIN 20mm. D CUT ASKED.

DIGIT 8: "G" - GOLD-PLATING HARDWARES (SOLDER TAG, NUT& WASHER),

NIL - NICKEL PLATED HARDWARES


** IF FEMALE THREAD (AS FIG. 2)-NO HARDWARES

** TAGS STANDARD SIZE #205. OPTION FOR #1110, #187 OR #250

DIGIT 9: COLOR OF INDEX, "R" RED, "B" BLACK

STANDARD (POPULAR) OF POSTS: 000, 410, 410T, 420D, 530.

FIGURES: ALL SIZE IN mm

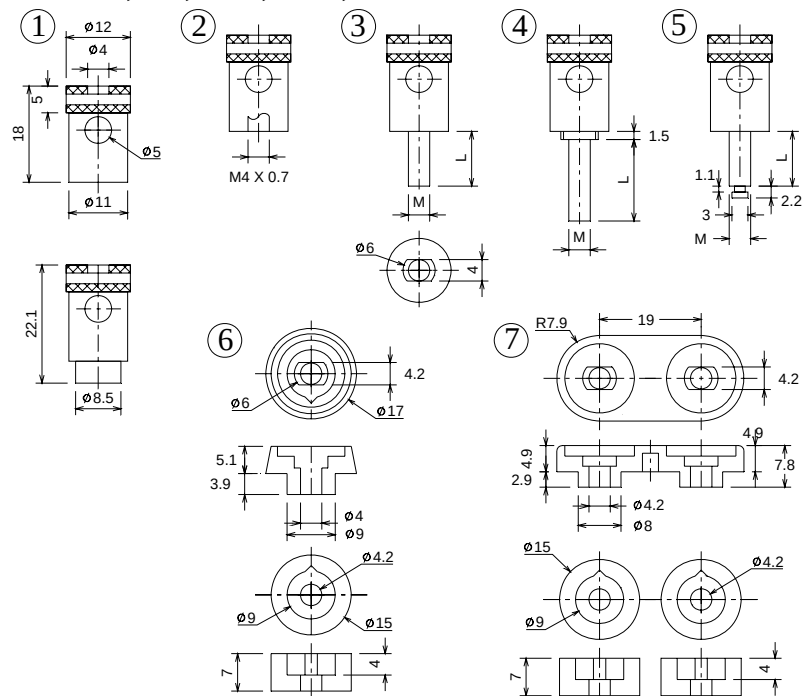





SOLID BINDING POST: BP-18, BP-19 & BP-21 SERIES

FEATURES : BRASS, 2 WAYS INPUT - 4mm BANANA PLUG & 6mm CABLE ENTRY HOLE

P / N (ORDER) CODE	DIGIT :	1	2	3	4	5	6	7	8	9	0
P / N :	BP18	N	-	R	4	10	-	-	-	G	R
P / N :	BP19	G	-	H	4	20	D	-	I	-	R
P / N :	BP21	G	-	R	5	30	D	T	P	-	B

DIGIT 1: BENNIC'S SOLID BINDING POST MODEL NUMBER

"BP18" (FIG. 1) - DIA 12mm ROUND HEAD, DIAMOND KNURL

"BP19" (FIG. 2) - DIA 15mm ROUND HEAD, LINE KNURL

"BP21" (FIG. 3) - HEX 14mm HEX HEAD, PLAIN SURFACE

DIGIT 2: PLATING - "G": 18K GOLD PLATING, "N": NICKEL PLATING

DIGIT 3: CANDLE RING SHARP - "R": ROUND (FIG. 4), "H": HAXAGON (FIG. 5)

DIGIT 4: THREAD SIZE OF POST (AS MARKED -M" ON SKETCH)

"4" - M4 x 0.70 THREAD "5" - M5 x 0.8 THREAD

DIGIT 5: THREAD LENGTH OF POST (AS MARKED "L" ON SKETCH)

"10" - 10mm, "15" - 15mm, "20" - 20mm, "30" - 30mm

DIGIT 6: "D" - WITH -D CUT" ON THE POST (FIG. 6)

NIL -W/O D CUT

DIGIT 7: "T" - WITH "TURRET" ON THE POST (FIG. 7)

NIL - MEANS W/O TURRET

DIGIT 8: "I" -W/I SINGLE INSULATOR KITS, M4 POST ONLY (FIG. 8)

"P" -W/I DUAL INSULATOR KITS, M4 POST ONLY (FIG. 9)

NIL - W/O INSULATOR KITS

TO FIT INSULATOR. POST ONLY M4, LENGTH MIN 20mm. D CUT ASKED.

DIGIT 9: "G" - GOLD PLATING HARDWARES (SOLDER TAG, NUT & WASHER)

NIL - NICKEL PLATING HARDWARES

DIGIT 0: COLOR OF INDEX, "R" RED, "B" BLACK


STANDARD (POPULAR) OF POSTS: R410, R410T, H410, R420D, R530,

IF ORDER FOR NON-STANDARD POST, REQUEST MIN. ORDER 10,000PCS.


** TAGS STANDARD SIZE #205, OPTION FOR #110, #187 OR #250

** PLEASE SEE NEXT PAGE FOR ALL FIGURES (SKETCHS)


BP -18




BP -19



BP -21



SKETCH / FIGURE (in mm) TOL. $\pm 1.0\text{mm}$

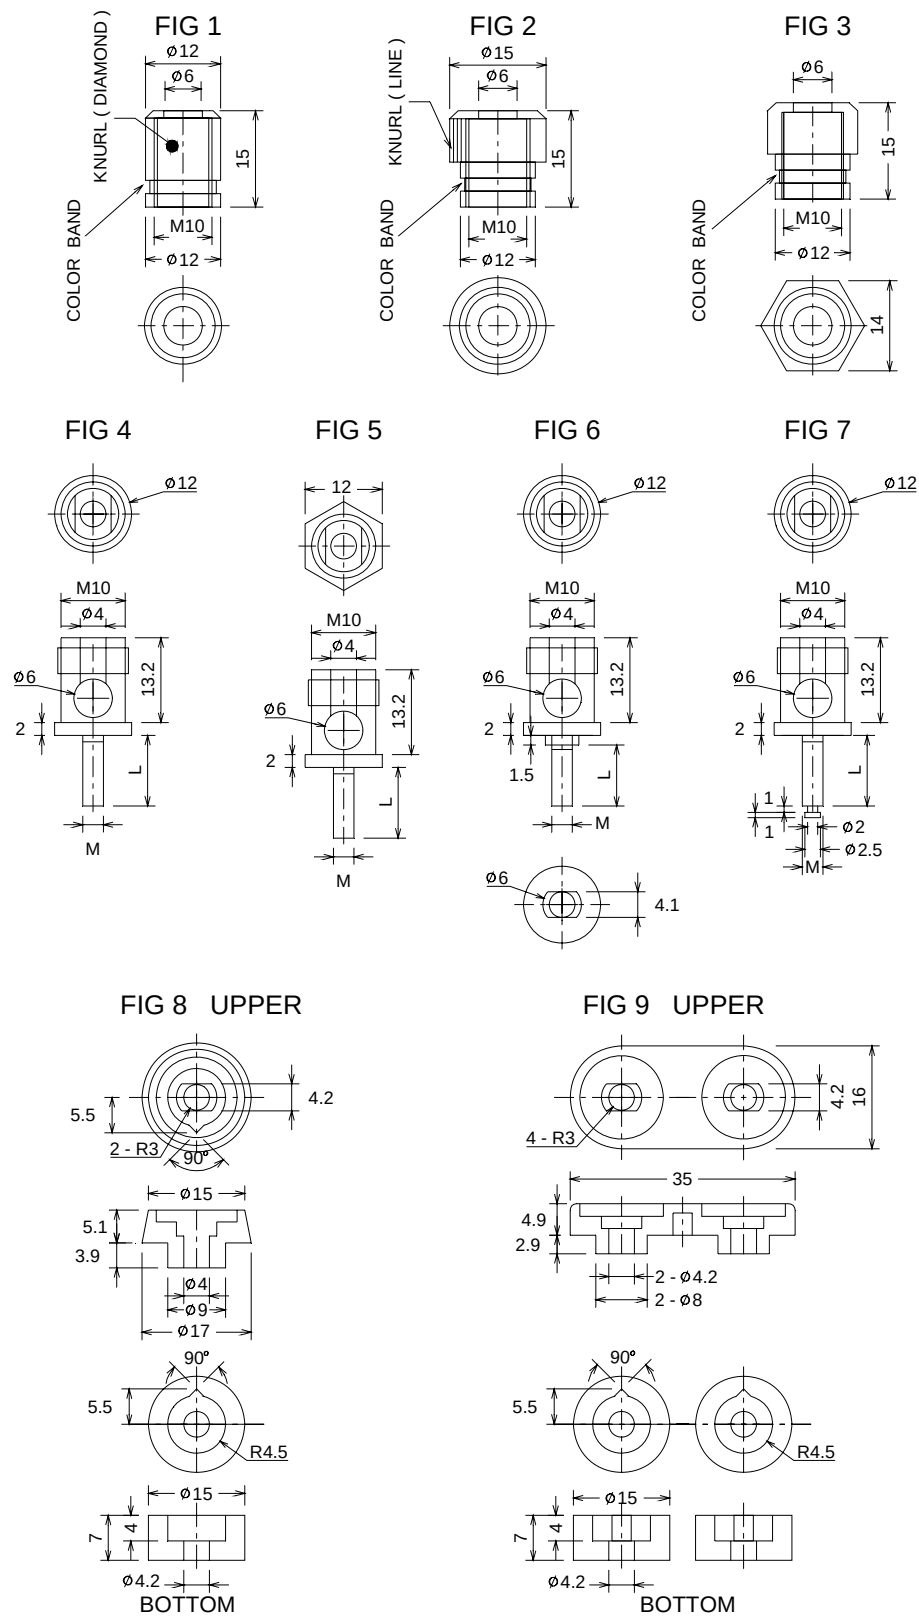



SOLID BINDING POST: BP-18U, BP-19U & BP-21U SERIES

FEATURES : BRASS, 2 WAYS INPUT - 4mm BANANA PLUG & 6mm SPADE PLUG

P / N (ORDER) CODE	DIGIT :	1	2	3	4	5	6	7	8	9	0
P / N :	BP18U	N	-	R	4	10	-	-	-	G	B
P / N :	BP19U	G	-	H	4	20	D	-	I	-	B
P / N :	BP21U	G	-	R	5	30	D	T	P	-	R

DIGIT 1: BENNIC'S "U" TYPE SOLID BINDING POST MODEL NUMBER

"BP18U" (FIG. 1) - DIA 12mm ROUND HEAD, DIAMOND KNURL

"BP19U" (FIG. 2) - DIA 15mm ROUND HEAD, LINE KNURL

"BP21U" (FIG. 3) - HEX 14mm HEX HEAD, PLAIN SURFACE

DIGIT 2: PLATING - "G": 18K GOLD PLATING, "N": NICKEL PLATING

DIGIT 3: CANDLE RING SHARP - "R": ROUND (FIG. 4), "H": HAXAGON (FIG. 5)

DIGIT 4: THREAD SIZE OF POST (AS MARKED -M" ON SKETCH)

"4" - M4 x 0.70 THREAD "5" - M5 x 0.8 THREAD

DIGIT 5: THREAD LENGTH OF POST (AS MARKED "L" ON SKETCH)

"10" - 10mm, "15" - 15mm, "20" - 20mm, "30" - 30mm

DIGIT 6: "D" - WITH -D CUT" ON THE POST (FIG. 6)

NIL - W/O D CUT

DIGIT 7: "T" - WITH "TURRET" ON THE POST (FIG. 7)

NIL - MEANS W/O TURRET

DIGIT 8: "I" -W/I SINGLE INSULATOR KITS, M4 POST ONLY (FIG. 8)

"P" -W/I DUAL INSULATOR KITS, M4 POST ONLY (FIG. 9)

NIL - W/O INSULATOR KITS

TO FIT INSULATOR. POST ONLY M4, LENGTH MIN 20mm. D CUT ASKED.

DIGIT 9: "G" - GOLD PLATING HARDWARES (SOLDER TAG, NUT & WASHER)

NIL - NICKEL PLATING HARDWARES

DIGIT 0: COLOR OF INDEX, "R" RED, "B" BLACK


STANDARD (POPULAR) OF POSTS: R410, R410T, H410, R420D, R530,

IF ORDER FOR NON-STANDARD POST, REQUEST MIN. ORDER 10,000PCS.


** TAGS STANDARD SIZE #205, OPTION FOR #110, #187 OR #250

** PLEASE SEE NEXT PAGE FOR ALL FIGURES (SKETCHS)


BP -18U



BP -19U





BP -21U





SKETCH / FIGURE (in mm) TOL. $\pm 1.0\text{mm}$

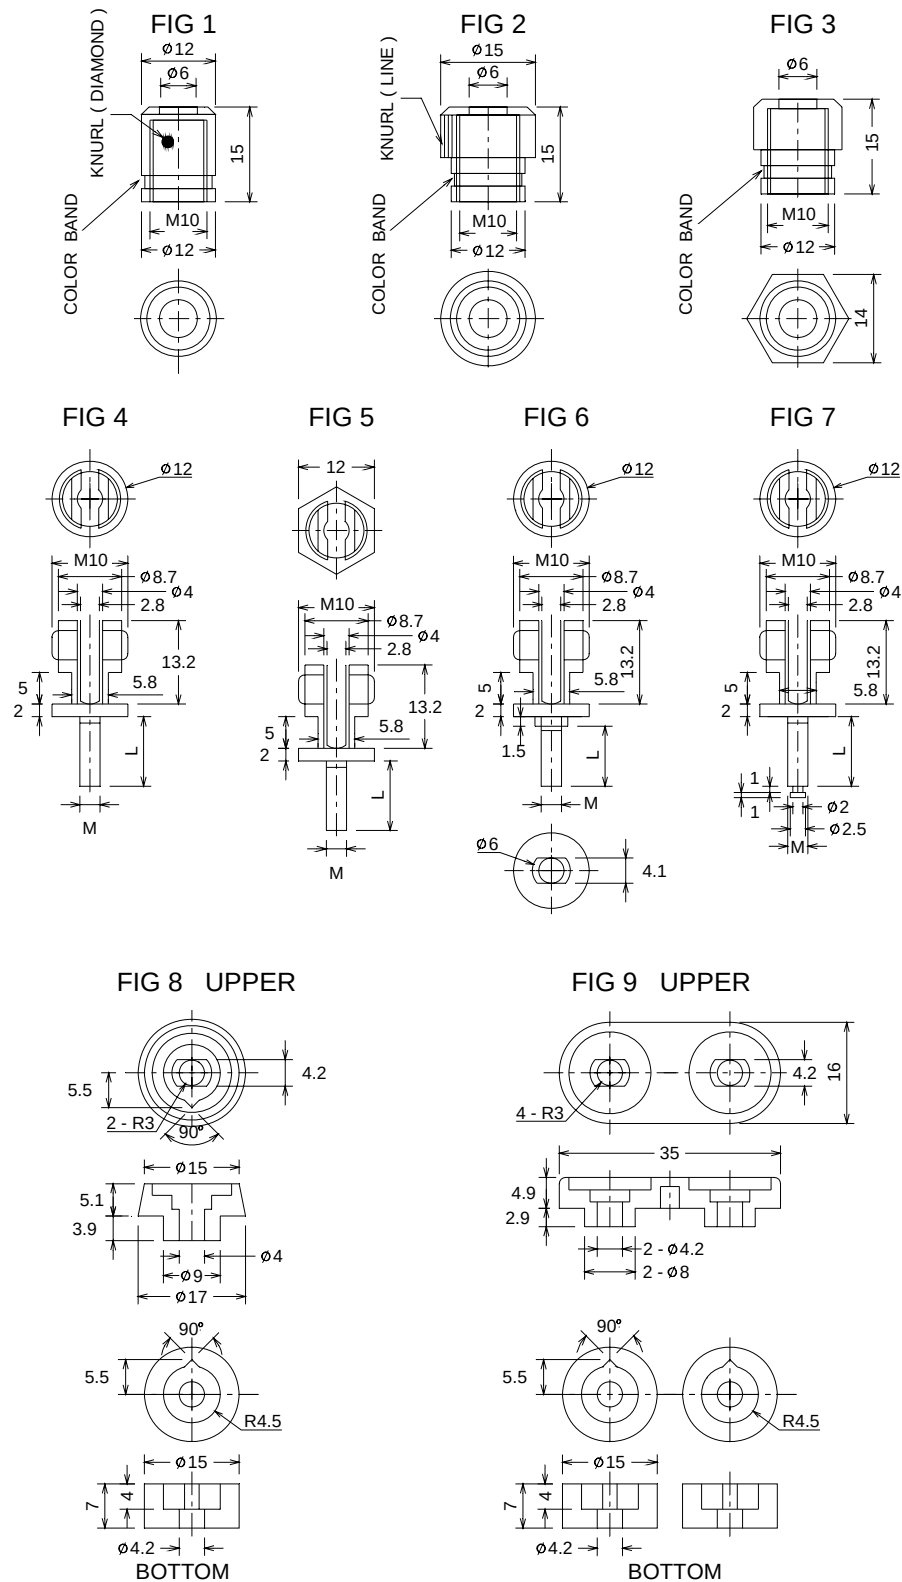



SOLID BINDING POST - BP-30 (3 WAYS INPUT) SERIES

1. FEATURES :

- ** 3 WAY INPUT - 4mm BANANA PLUG, 6mm CABLE HOLE, 6mm SPADE PLUG**
**** ALL MADE BY BRASS, 15mm DIA. KNOB**
**** M5 THREAD ALSO AVAILABLE**
**** THREAD STANDARD LENGTH 10mm, SPECIAL LENGTH ALSO AVAILABLE**


2. PARTS NUMBER:

BP-30G - .18K GOLD-PLATING
BP-30N - NICKEL - PLATING

3. HARDWARE:

- ** SPRING WASHER: 4Ø OR 5 Ø
 ** SOLDER TERMINALS: STANDARD #205 (5mm) OR OPTION FOR #110 (2.8mm), #187(4.8mm)
 & #250(6.3mm)
 ** HEX NUT: M4 x 0.70 OR M5 x 0.80

4. DIMENSION (mm):

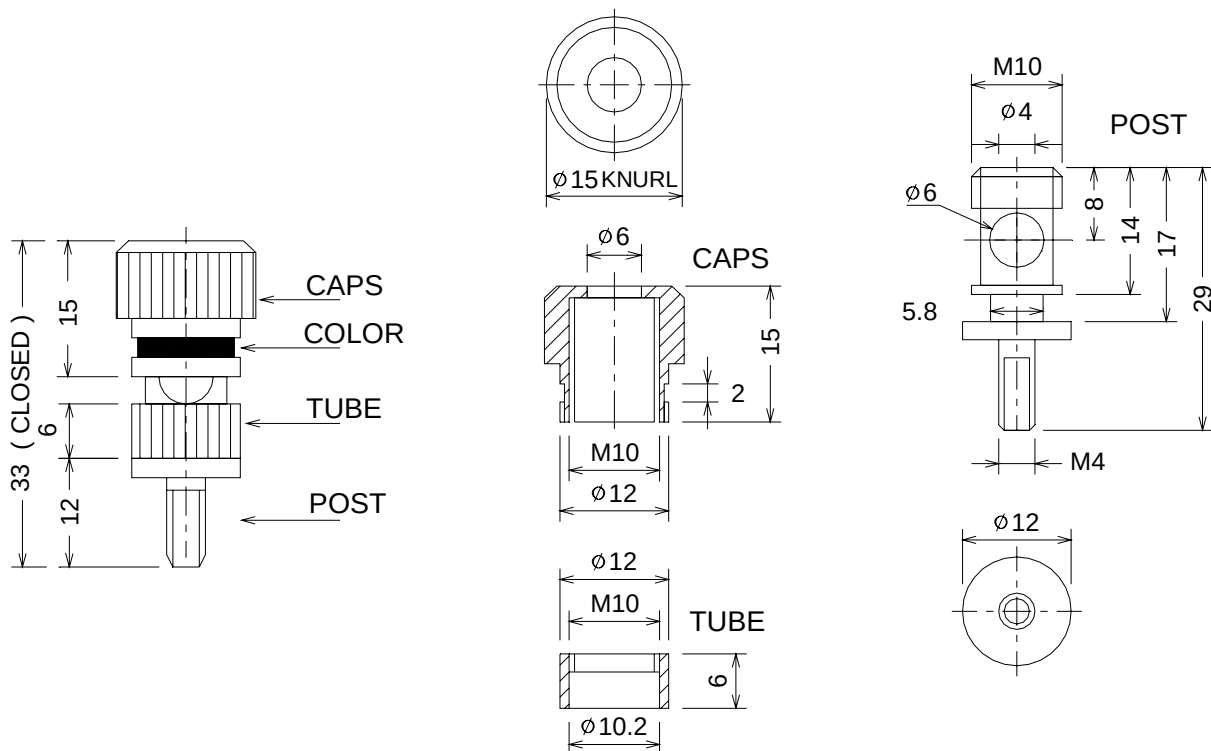

NB : THREAD OPTION FOR M5
THREAD LENGTH OPTION FOR 20mm OR 30mm



BENNIC SPEAKER TERMINALS - SP-02 SERIES

FEATURES : ** FOR HI-END RAW SPEAKER UNIT USE, BINDING POST INPUT.
** ACCEPT 4mm BANANA PLUG, 5mm OR 6mm CABLE ENTRY HOLE
** FASTON #205 (OPTION #110, #187 & #250)-INPUTS
** ABS PLASTIC INSULATOR SHEET - SP02 SERIES

P / N (ORDER) CODE **DIGIT :** 1 2 3 4
 P / N : SP-02- D N N

DIGIT 1: SP-01-BENNIC SERIES SPEAKER TERMINAL (FIBER SHEET)
SP-02-BENNIC SERIES SPEAKER TERMINAL (PLASTIC SHEET)

DIGIT 2: TYPE OF BINDING POST


- A - USE BP10A (PLASTIC CAPS, W/I INSERT THREAD) B/POST
- B - USE BP10 (PLASTIC CAPS, W/O INSERT THREAD) B/POST
- C - USE BP18 (COPPER CAPS, DIA. 12mm) SOLID B/POST
- D - USE BP19 (COPPER CAPS, DIA. 15mm) SOLID B/POST
- F - USE BP21 (COPPER CAPS, HEX. 14mm) SOLID B/POST
- H - USE BP17 (PUSH & RELEASE TYPE) SOLID B/POST
- R - USE BP22 (PUSH & RELEASE TYPE) SOLID B/POST
- J - USE BP12A (COPPER UNSCREW CAPS, DIA. 14mm) SOLID B/POST
- E - USE BP16 (FULLY TRANSPARENT INSULATION) SOLID B/POST
- O - USE BP11 (COPPER UNSCREW CAPS, DIA. 12mm)
- P - USE BP12 (COPPER UNSCREW CAPS, DIA. 14mm) SOLID B/POST
- Q - USE BP13 (COPPER UNSCREW CAPS, HEX. 13mm) SOLID B/POST

DIGIT 3: G - GOLD PLATING B/POST N-NICKEL PLATING B/POST

DIGIT 4: G - HARDWARES (TAGS, NUT & WASHER) AT GOLD PLATING.
N - HARDWARES (TAGS, NUT & WASHER) AT NICKEL PLATING







** CAPS COLOR: RED & BLACK

** FASTON TAGS SIZE: #205 (OPTION FOR #110, #187 & #250)

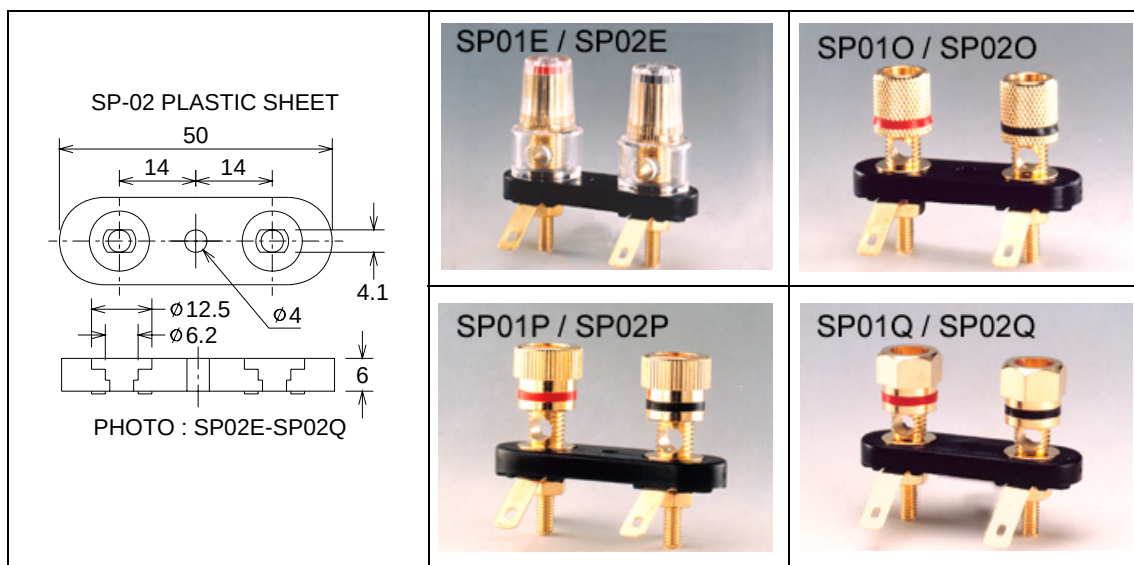



PUSH TERMINALS - STANDARD TYPE

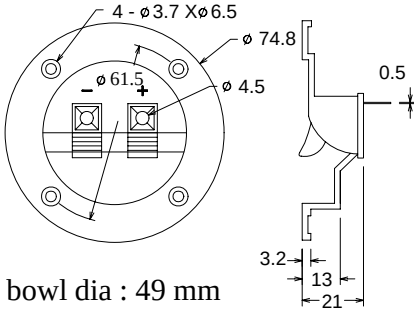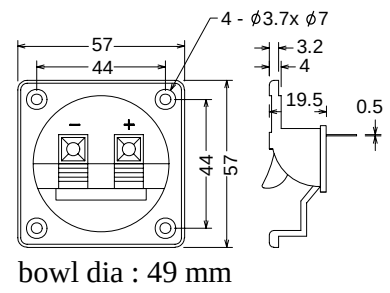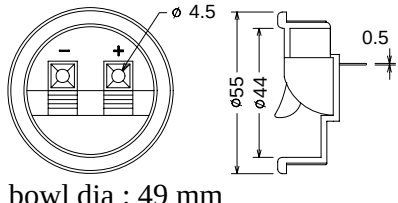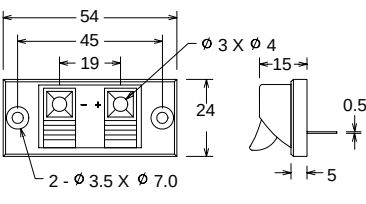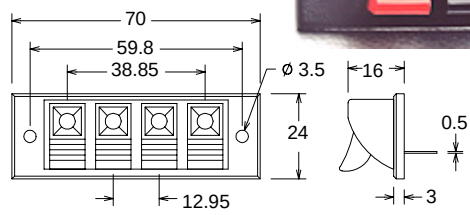RPT   bowl dia : 49 mm	TPT   bowl dia : 49 mm
RPT- 1   bowl dia : 49 mm	
MPT- 2  	MPT- 4  

** Custom design are welcomed BENNIC will pay tooling if quantity are met.

** STANDARD TAG SIZE #205 (5mm) option for #110 or #187



TERMINALS - TPT-21 BI-WIRING SERIES


FEATURE: ** ECONOMIC TYPE., REMOVABLE LINKING BAR, SIZE 67mm x 100mm
** PUSH BOTTOM, SOLDER TAGS (FASTON) 5mm (#205)

ORDER (P/N) CODE: TPT-21 (W/O GASKET)
TPT-21S (WITH GASKET)

CAPS COLOR: RED FOR "+" BLACK FOR "-"

LINKING BAR: STEEL, NICKEL PLATING

DIMENSION (mm)

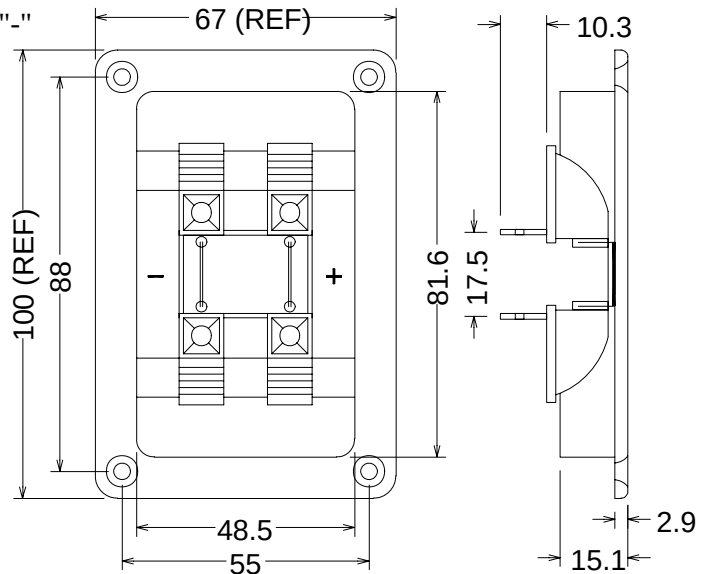

TERMINALS - TPT-22 (4 WAYS. FEED THROUGH) SERIES


FEATURE: ** ECONOMIC TYPE, SIZE 67mm x 100mm
** PUSH BOTTOM TYPE. , SOLDER TAGS (FASTON) 5mm (#205)

ORDER (P/N) CODE: TPT-22 (W/O GASKET)
TPT-22S (WITH GASKET)

** WORDING "INPUT" & "OUTPUT" CAN BE CHANGED. ACCORDINGLY TO YOUR DESIGN.

CAPS COLOR: RED FOR "+" BLACK FOR "-"

DIMENSION IN (mm)

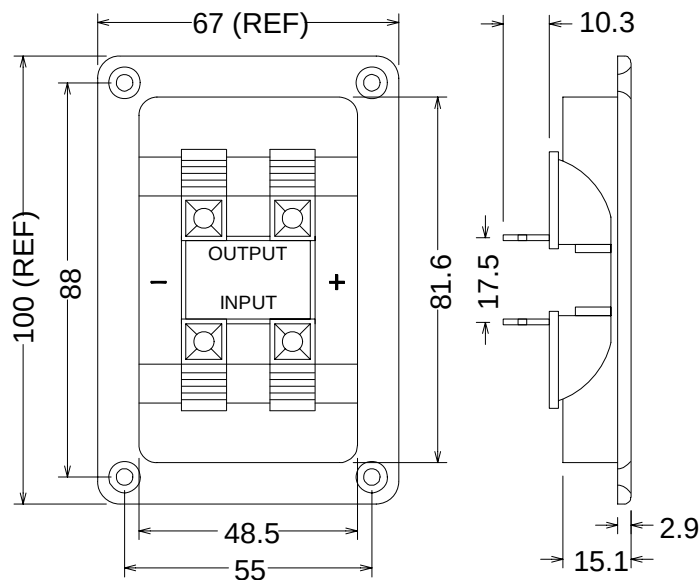



TERMINALS - RPT-15 SERIES


FEATURES: ** ROUND TYPE - STANDARD SIZE (O.D 105mm)


** FIT 4mm BANANA JACK OR 5mm CABLE HOLE OR 6mm SPADE PLUGS

ORDER (P/N) CODE:	P/N	:	RPT-15	G	C	U	S	L	-	G
	DIGIT	:	1	2	3	4	5	6		7

- 1: RPT - 15 : BENNIC RPT-15 SERIES TERMINAL
- 2: G - 18K GOLD-PLATING B/POST., N-NICKEL PLATING B/POST
- 3: A - USE BP10A (PLASTIC CAPS, W/I INSERT THREAD) B/POST
 C - USE BP18 (COPPER CAPS, DIA. 12mm) SOLID B/POST
 D - USE BP19 (COPPER CAPS, DIA. 15mm) SOLID B/POST
 F - USE BP21 (COPPER CAPS, HEX. 14mm) SOLID B/POST
 H - USE BP17 (PUSH & RELEASE TYPE) SOLID B/POST
 R - USE BP22 (PUSH & RELEASE TYPE) SOLID B/POST
 J - USE BP12A (COPPER UNSCREW CAPS, DIA. 14mm) SOLID B/POST
 E - USE BP16 (FULLY TRANSPARENT INSULATION) SOLID B/POST
 O - USE BP11 (COPPER UNSCREW CAPS, DIA. 12mm)
 P - USE BP12 (COPPER UNSCREW CAPS, DIA. 14mm) SOLID B/POST
 Q - USE BP13 (COPPER UNSCREW CAPS, HEX. 13mm) SOLID B/POST
 NIL - USE BP-10 (PLASTIC CAPS W/O INSERT THREAD) B/POST
- 4: U - SOLID B/POST BP-18, BP-19, OR BP-21 USE "U" TYPE
 UR410 (TO ACCEPT 6mm SPADE PLUG) POST.
 NIL - USE STANDARD R410 POST
- 5: S - W/I GASKET. , NIL - W/O GASKET
- 6: L - W/I LEGS/SLOT (FOR FIT PCB). , NIL - W/O LEGS/SLOT
- 7: G - HARDWARE (TAGS, NUT & WASHER) AT GOLD PLATING,
 NIL - HARDWARE AT NICKEL OR TIN PLATING

DIMENSION (mm): ** CAPS COLOR: RED FOR "+", BLACK FOR "-"
 ** TAGS SIZE: #205 (#250 OR #110, #187 OPTIONAL)
 ** B/POST SPECIAL PITCHED 25mm ALSO ACCEPTABLE

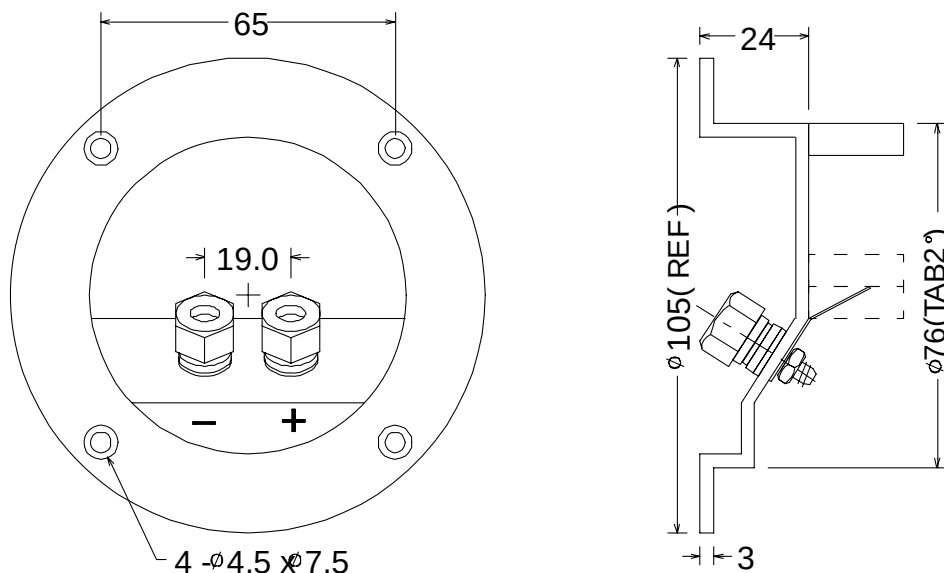




TERMINALS - RPT-16 SERIES

FEATURES: ** ROUND TYPE - STANDARD SIZE (O.D 80mm)
 ** FIT 4mm BANANA JACK OR 5mm CABLE HOLE OR 6mm SPADE PLUGS
 ** QUICK FILLED (SCREWS NOT REQUIRED) INTO CABINET

ORDER (P/N) CODE:	P/N	:	RPT-16	G	C	U	-	G
	DIGIT	:	1	2	3	4		5

- 1: RPT - 16 : BENNIC RPT-16 SERIES TERMINAL
- 2: G - 18K GOLD-PLATING B/POST., N-NICKEL PLATING B/POST
- 3: A - USE BP10A (PLASTIC CAPS, W/I INSERT THREAD) B/POST
C - USE BP18 (COPPER CAPS, DIA. 12mm) SOLID B/POST
D - USE BP19 (COPPER CAPS, DIA. 15mm) SOLID B/POST
F - USE BP21 (COPPER CAPS, HEX. 14mm) SOLID B/POST
H - USE BP17 (PUSH & RELEASE TYPE) SOLID B/POST
R - USE BP22 (PUSH & RELEASE TYPE) SOLID B/POST
J - USE BP12A (COPPER UNSCREW CAPS, DIA. 14mm) SOLID B/POST
E - USE BP16 (FULLY TRANSPARENT INSULATION) SOLID B/POST
O - USE BP11 (COPPER UNSCREW CAPS, DIA. 12mm)
P - USE BP12 (COPPER UNSCREW CAPS, DIA. 14mm) SOLID B/POST
Q - USE BP13 (COPPER UNSCREW CAPS, HEX. 13mm) SOLID B/POST
NIL - USE BP-10 (PLASTIC CAPS W/O INSERT THREAD) B/POST
- 4: U - SOLID B/POST BP-18, BP-19, OR BP-21 USE "U" TYPE
UR410 (TO ACCEPT 6mm SPADE PLUG) POST.
NIL - USE STANDARD R410 POST
- 5: G - HARDWARE (TAGS, NUT & WASHER) AT GOLD PLATING,
NIL - HARDWARE AT NICKEL OR TIN PLATING

DIMENSION (mm): ** CAPS COLOR: RED FOR "+", BLACK FOR "-"
 ** TAGS SIZE: #205 (#250 OR #110, #187 OPTIONAL)

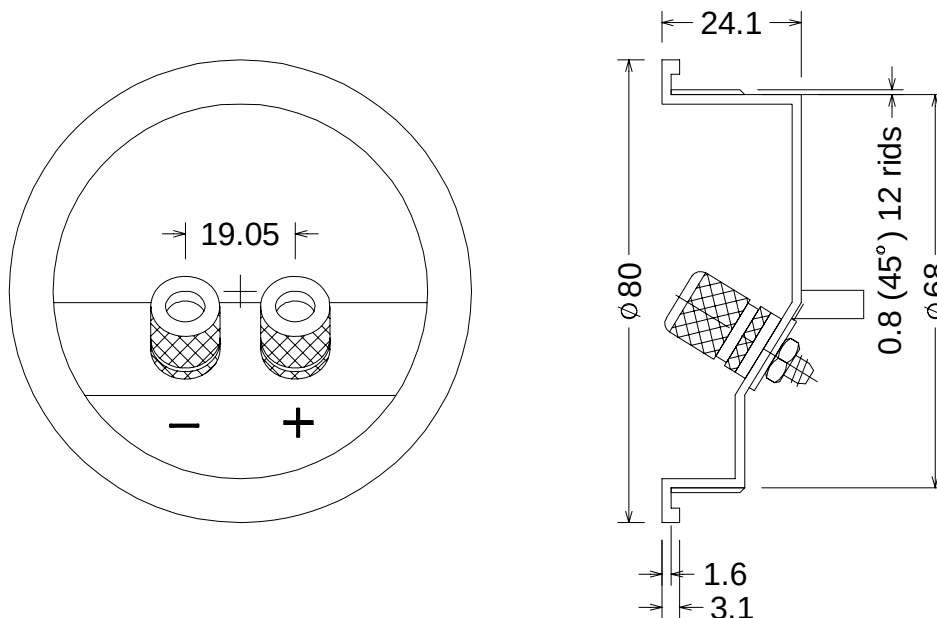



TERMINALS - RPT-17 SERIES

FEATURES: ** ROUND TERMINAL - MEDIUM SIZE (O.D 75mm)


** FIT 4mm BANANA JACK OR 5mm CABLE HOLE OR 6mm SPADE PLUGS

ORDER (P/N) CODE:

P/N	:	RPT-17	G	C	U	S	-	G
DIGIT	:	1	2	3	4	5		6

- 1: RPT - 17 : BENNIC RPT-17 SERIES TERMINAL
- 2: G - 18K GOLD-PLATING B/POST., N-NICKEL PLATING B/POST
- 3: A - USE BP10A (PLASTIC CAPS, W/I INSERT THREAD) B/POST
C - USE BP18 (COPPER CAPS, DIA. 12mm) SOLID B/POST
D - USE BP19 (COPPER CAPS, DIA. 15mm) SOLID B/POST
F - USE BP21 (COPPER CAPS, HEX. 14mm) SOLID B/POST
H - USE BP17 (PUSH & RELEASE TYPE) SOLID B/POST
R - USE BP22 (PUSH & RELEASE TYPE) SOLID B/POST
J - USE BP12A (COPPER UNSCREW CAPS, DIA. 14mm) SOLID B/POST
E - USE BP16 (FULLY TRANSPARENT INSULATION) SOLID B/POST
O - USE BP11 (COPPER UNSCREW CAPS, DIA. 12mm)
P - USE BP12 (COPPER UNSCREW CAPS, DIA. 14mm) SOLID B/POST
Q - USE BP13 (COPPER UNSCREW CAPS, HEX. 13mm) SOLID B/POST
NIL - USE BP-10 (PLASTIC CAPS W/O INSERT THREAD) B/POST
- 4: U - SOLID B/POST BP-18, BP-19, OR BP-21 USE "U" TYPE
UR410 (TO ACCEPT 6mm SPADE PLUG) POST.
NIL - USE STANDARD R410 POST
- 5: S - W/I GASKET. , NIL - W/O GASKET
- 6: G - HARDWARE (TAGS, NUT & WASHER) AT GOLD PLATING,
NIL - HARDWARE AT NICKEL OR TIN PLATING

DIMENSION (mm): ** CAPS COLOR: RED FOR "+", BLACK FOR "-"
** TAGS SIZE: #205 (#250 OR #110, #187 OPTIONAL)

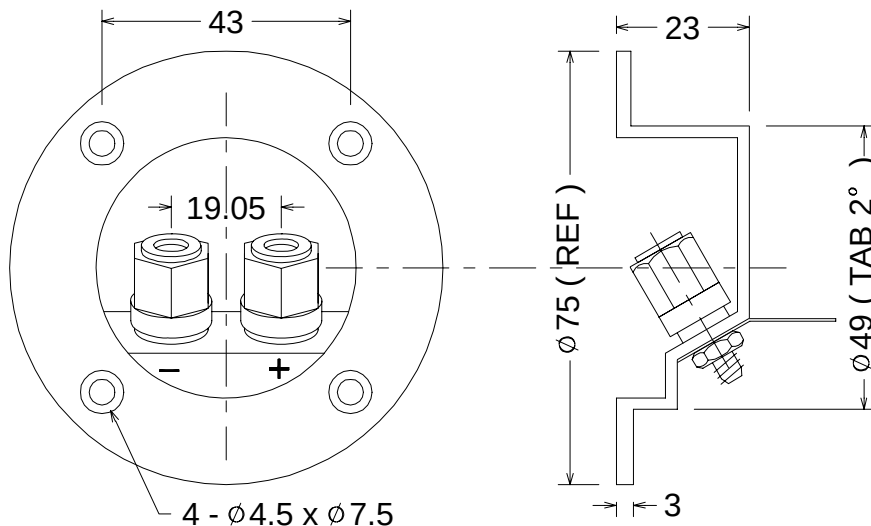


**TERMINALS - SPT-11, SPT-13 SERIES**

FEATURES: ** SQUARE SHARP ROUND BOWL TERMINAL, SIZE 57mm x 57mm
 ** FIT 4mm BANANA JACK OR 5mm CABLE HOLE OR 6mm SPADE PLUGS
 ** FILLED (SCREWS REQUIRET) INTO CABINET

ORDER (P/N) CODE: P/N : SPT-11 - G C U S - G
 DIGIT : 1 2 3 4 5 6

- 1: SPT-11 : BENNIC SPT-11/SPT-13 SERIES TERMINAL
- 2: G - 18K GOLD-PLATING B/POST. , N - NICKEL PLATING B/POST
- 3: A - USE BP10A (PLASTIC CAPS, W/I INSERT THREAD) B/POST
 C - USE BP18 (COPPER CAPS, DIA.12mm) SOLID B/POST
 D - USE BP19 (COPPER CAPS, DIA.15mm) SOLID B/POST
 F - USE BP21 (COPPER CAPS, HEX. 14mm) SOLID B/POST
 H - USE BP17 (PUSH & RELEASE TYPE) SOLID B/POST
 R - USE BP22 (PUSH & RELEASE TYPE) SOLID B/POST
 J - USE BP12A (COPPER UNSCREW CAPS, DIA. 14mm) SOLID B/POST
 E - USE BP16 (FULLY TRANSPARENT INSULATION) SOLID B/POST
 O - USE BP11 (COPPER UNSCREW CAPS, DIA. 12mm)
 P - USE BP12 (COPPER UNSCREW CAPS, DIA. 14mm) SOLID B/POST
 Q - USE BP13 (COPPER UNSCREW CAPS, HEX. 13mm) SOLID B/POST
 NIL - USE BP-10 (PLASTIC CAPS W/O INSERT THREAD) B/POST
- 4: U - SOLID B/POST BP-18, BP-19, OR BP-21 USE "U" TYPE
 UR410 (TO ACCEPT 6mm SPADE PLUG) POST.
 NIL - USE STANDARD R410 POST
- 5: L -W/I 4 LEGS FOR PIT PCB. , NIL - W/O LEGS
- 6: G - HARDWARE (TAGS, NUT & WASHER) AT GOLD PLATING,
 NIL - HARDWARE AT NICKEL OR TIN PLATING

DIMENSION (mm): ** CAPS COLOR: RED FOR "+", BLACK FOR "-"
 ** TAGS SIZE: #205 (#250 OR #110, #187 OPTIONAL)

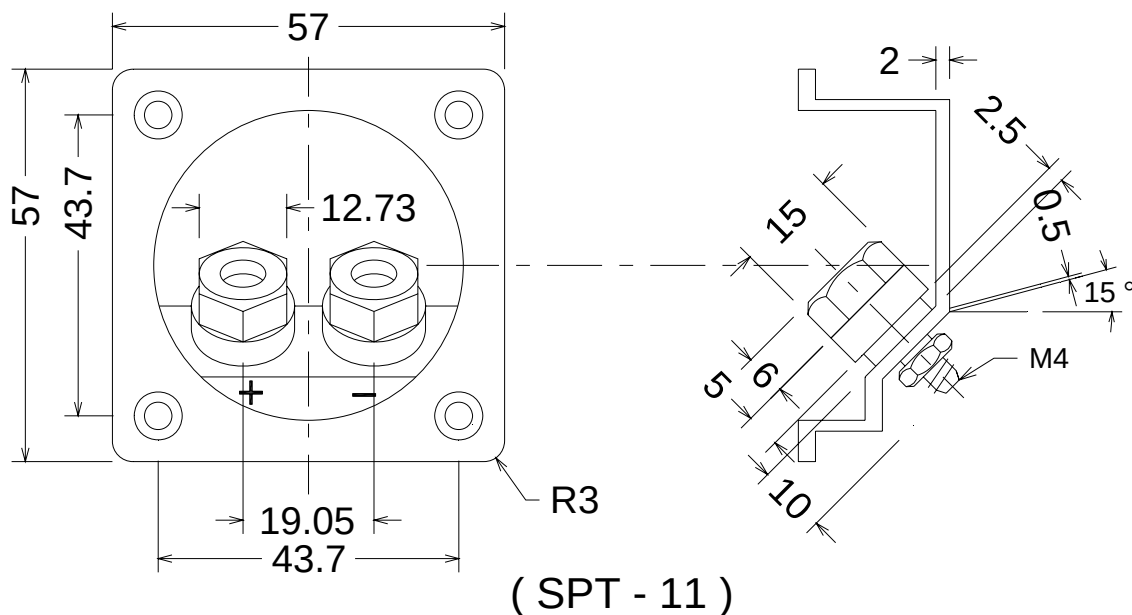




TERMINALS - SPT-15 SERIES

FEATURES: ** SQUARE SHARP ROUND BOWL TERMINAL, SIZE 98mm x 98mm
 ** FIT 4mm BANANA JACK OR 5mm CABLE HOLE OR 6mm SPADE PLUGS
 ** QUICK FILLED (SCREWS REQUIRED) INTO CABINET

ORDER (P/N) CODE: P/N : SPT-15 - G C U S L - G
 DIGIT : 1 2 3 4 5 6 7

- 1: SPT-15 : BENNIC SPT-15 SERIES TERMINAL
- 2: G - 18K GOLD-PLATING B/POST., N-NICKEL PLATING B/POST
- 3: A - USE BP10A (PLASTIC CAPS, W/I INSERT THREAD) B/POST
 C - USE BP18 (COPPER CAPS, DIA. 12mm) SOLID B/POST
 D - USE BP19 (COPPER CAPS, DIA. 15mm) SOLID B/POST
 F - USE BP21 (COPPER CAPS, HEX. 14mm) SOLID B/POST
 H - USE BP17 (PUSH & RELEASE TYPE) SOLID B/POST
 R - USE BP22 (PUSH & RELEASE TYPE) SOLID B/POST
 J - USE BP12A (COPPER UNSCREW CAPS, DIA. 14mm) SOLID B/POST
 E - USE BP16 (FULLY TRANSPARENT INSULATION) SOLID B/POST
 O - USE BP11 (COPPER UNSCREW CAPS, DIA. 12mm)
 P - USE BP12 (COPPER UNSCREW CAPS, DIA. 14mm) SOLID B/POST
 Q - USE BP13 (COPPER UNSCREW CAPS, HEX. 13mm) SOLID B/POST
 NIL - USE BP-10 (PLASTIC CAPS W/O INSERT THREAD) B/POST
- 4: U - SOLID B/POST BP-18, BP-19, OR BP-21 USE "U" TYPE
 UR410 (TO ACCEPT 6mm SPADE PLUG) POST.
 NIL - USE STANDARD R410 POST
- 5: S - W/I GASKET. , NIL - W/O GASKET
- 6: L -W/I LEGS FOR PIT PCB. , NIL - W/O LEGS
- 7: G - HARDWARE (TAGS, NUT & WASHER) AT GOLD PLATING,
 NIL - HARDWARE AT NICKEL OR TIN PLATING .

DIMENSION (mm): ** CAPS COLOR: RED FOR "+", BLACK FOR "-"
 ** TAGS SIZE: #205 (#250 OR #110, #187 OPTIONAL)

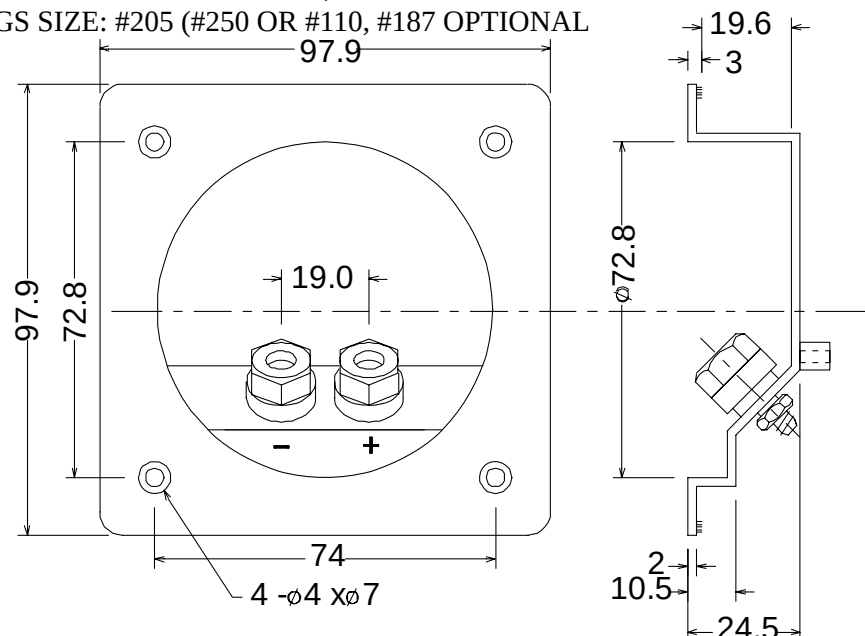





TERMINALS - SPT-16 SERIES

FEATURES: ** SQUARE SHARP ROUND BOWL TERMINAL, SIZE 80mm x 80mm
 ** FIT 4mm BANANA JACK OR 5mm CABLE HOLE OR 6mm SPADE PLUGS
 ** QUICK FILLED (SCREWS NOT REQUIRED) INTO CABINET

ORDER (P/N) CODE: P/N : SPT-16 - G C U - G
 DIGIT : 1 2 3 4 5

- 1: SPT-16 : BENNIC SPT-16 SERIES TERMINAL
- 2: G - 18K GOLD-PLATING B/POST., N-NICKEL PLATING B/POST
- 3: A - USE BP10A (PLASTIC CAPS, W/I INSERT THREAD) B/POST
C - USE BP18 (COPPER CAPS, DIA. 12mm) SOLID B/POST
D - USE BP19 (COPPER CAPS, DIA. 15mm) SOLID B/POST
F - USE BP21 (COPPER CAPS, HEX. 14mm) SOLID B/POST
H - USE BP17 (PUSH & RELEASE TYPE) SOLID B/POST
R - USE BP22 (PUSH & RELEASE TYPE) SOLID B/POST
J - USE BP12A (COPPER UNSCREW CAPS, DIA. 14mm) SOLID B/POST
E - USE BP16 (FULLY TRANSPARENT INSULATION) SOLID B/POST
O - USE BP11 (COPPER UNSCREW CAPS, DIA. 12mm)
P - USE BP12 (COPPER UNSCREW CAPS, DIA. 14mm) SOLID B/POST
Q - USE BP13 (COPPER UNSCREW CAPS, HEX. 13mm) SOLID B/POST
NIL - USE BP-IO (PLASTIC CAPS W/O INSERT THREAD) B/POST
- 4: U - SOLID B/POST BP-18, BP-19, OR BP-21 USE "U" TYPE
UR410 (TO ACCEPT 6mm SPADE PLUG) POST.
NIL - USE STANDARD R410 POST
- 5: G - HARDWARE (TAGS, NUT & WASHER) AT GOLD PLATING,
NIL - HARDWARE AT NICKEL OR TIN PLATING

DIMENSION (mm): ** CAPS COLOR: RED FOR "+", BLACK FOR "-"
 ** TAGS SIZE: #205 (#250 OR #110, #187 OPTIONAL)

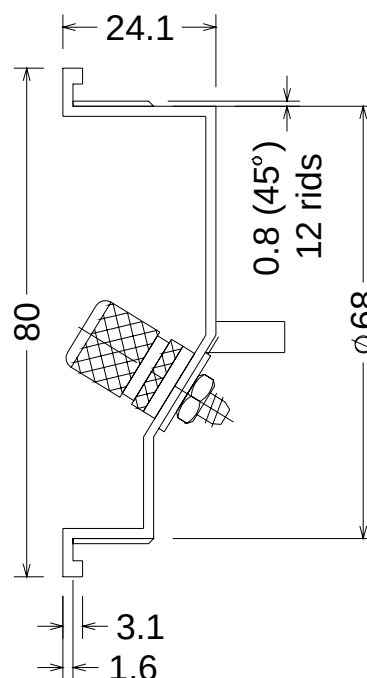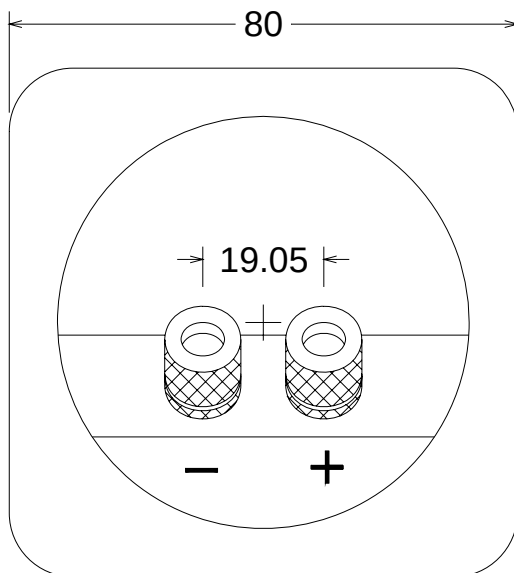




TERMINALS - TPT-10 SERIES

FEATURES: ** RECTANGLE SHARP TERMINAL, SIZE 80mm x 94mm
** FIT 4mm BANANA JACK OR 5mm CABLE HOLE OR 6mm SPADE PLUGS

ORDER (P/N) CODE: P/N : TPT-10 - G C U S L - G
DIGIT : 1 2 3 4 5 6 7

- 1: TPT-10 : BENNIC TPT-10 SERIES TERMINAL
- 2: G - 18K GOLD-PLATING B/POST., N-NICKEL PLATING B/POST
- 3: A - USE BP10A (PLASTIC CAPS, W/I INSERT THREAD) B/POST
C - USE BP18 (COPPER CAPS, DIA. 12mm) SOLID B/POST
D - USE BP19 (COPPER CAPS, DIA. 15mm) SOLID B/POST
F - USE BP21 (COPPER CAPS, HEX. 14mm) SOLID B/POST
H - USE BP17 (PUSH & RELEASE TYPE) SOLID B/POST
R - USE BP22 (PUSH & RELEASE TYPE) SOLID B/POST
J - USE BP12A (COPPER UNSCREW CAPS, DIA. 14mm) SOLID B/POST
E - USE BP16 (FULLY TRANSPARENT INSULATION) SOLID B/POST
O - USE BP11 (COPPER UNSCREW CAPS, DIA. 12mm)
P - USE BP12 (COPPER UNSCREW CAPS, DIA. 14mm) SOLID B/POST
Q - USE BP13 (COPPER UNSCREW CAPS, HEX. 13mm) SOLID B/POST
NIL -USE BP-10 (PLASTIC CAPS W/O INSERT THREAD) B/POST
- 4: U - SOLID B/POST BP-18, BP-19, OR BP-21 USE "U" TYPE
UR410 (TO ACCEPT 6mm SPADE PLUG) POST.
NIL - USE STANDARD R410 POST
- 5: S-W/I GASKET., NIL - W/O GASKET
- 6: L -W/I LEGS/SLOT (FOR FIT PCB). , NIL - W/O LEGS/SLOT
- 7: G - HARDWARE (TAGS, NUT & WASHER) AT GOLD PLATING,
NIL - HARDWARE AT NICKEL OR TIN PLATING

DIMENSION (mm): ** B/POST SPECIAL PITCHED 30mm ALSO ACCEPTABLE
** CAPS COLOR: RED FOR "+", BLACK FOR "-"
** TAGS SIZE: #205 (#250 OR #110, #187 OPTIONAL)

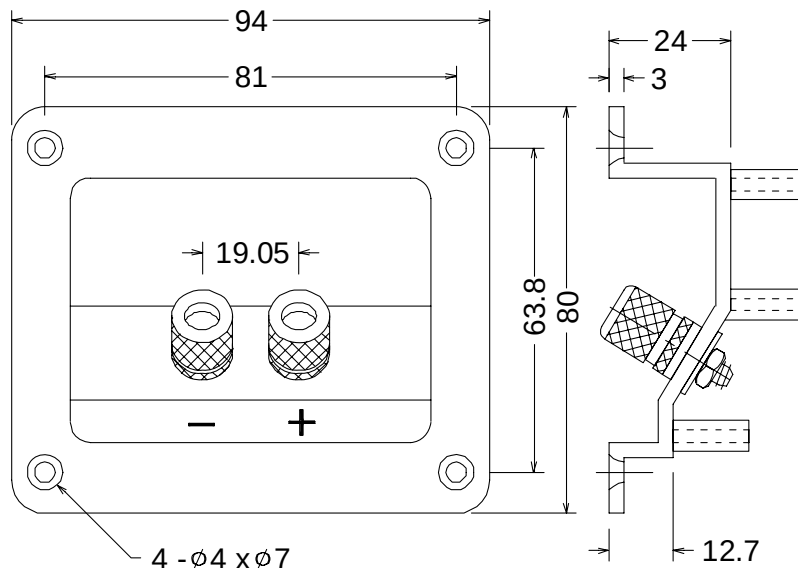




TERMINALS - TPT-15 SERIES

FEATURES: ** RECTANGLE SHARP - BIGGER SIZE (92mm x 110mm)
 ** FIT 4mm BANANA JACK OR 5mm CABLE HOLE OR 6mm SPADE PLUGS

ORDER (P/N) CODE: P/N : TPT-15 - G C U S L - G
 DTGTT : 1 2 3 4 5 6 7

- 1: TPT-15 : BENNIC TPT-15 SERIES TERMINAL
- 2: G - 18K GOLD-PLATING B/POST., N-NICKEL PLATING B/POST
- 3: A - USE BP10A (PLASTIC CAPS, W/I INSERT THREAD) B/POST
 C - USE BP18 (COPPER CAPS, DIA. 12mm) SOLID B/POST
 D - USE BP19 (COPPER CAPS, DIA. 15mm) SOLID B/POST
 F - USE BP21 (COPPER CAPS, HEX. 14mm) SOLID B/POST
 H - USE BP17 (PUSH & RELEASE TYPE) SOLID B/POST
 R - USE BP22 (PUSH & RELEASE TYPE) SOLID B/POST
 J - USE BP12A (COPPER UNSCREW CAPS, DIA. 14mm) SOLID B/POST
 E - USE BP16 (FULLY TRANSPARENT INSULATION) SOLID B/POST
 O - USE BP11 (COPPER UNSCREW CAPS, DIA. 12mm)
 P - USE BP12 (COPPER UNSCREW CAPS, DIA. 14mm) SOLID B/POST
 Q - USE BP13 (COPPER UNSCREW CAPS, HEX. 13mm) SOLID B/POST
 NIL - USE BP-10 (PLASTIC CAPS W/O INSERT THREAD) B/POST
- 4: U - SOLID B/POST BP-18, BP-19, OR BP-21 USE "U" TYPE
 UR410 (TO ACCEPT 6mm SPADE PLUG) POST.
 NIL - USE STANDARD R410 POST
- 5: S - W/I GASKET., NIL - W/O GASKET
- 6: L - W/I 4 LEGS FOR FIT PCB. , NIL - W/O LEGS
- 7: G - HARDWARE (TAGS, NUT & WASHER) AT GOLD PLATING,
 NIL - HARDWARE AT NICKEL OR TIN PLATING

DIMENSION (mm): ** CAPS COLOR: RED FOR "+", BLACK FOR "-"
 ** TAGS SIZE: #205 (#250 OR #110, #187 OPTIONAL)

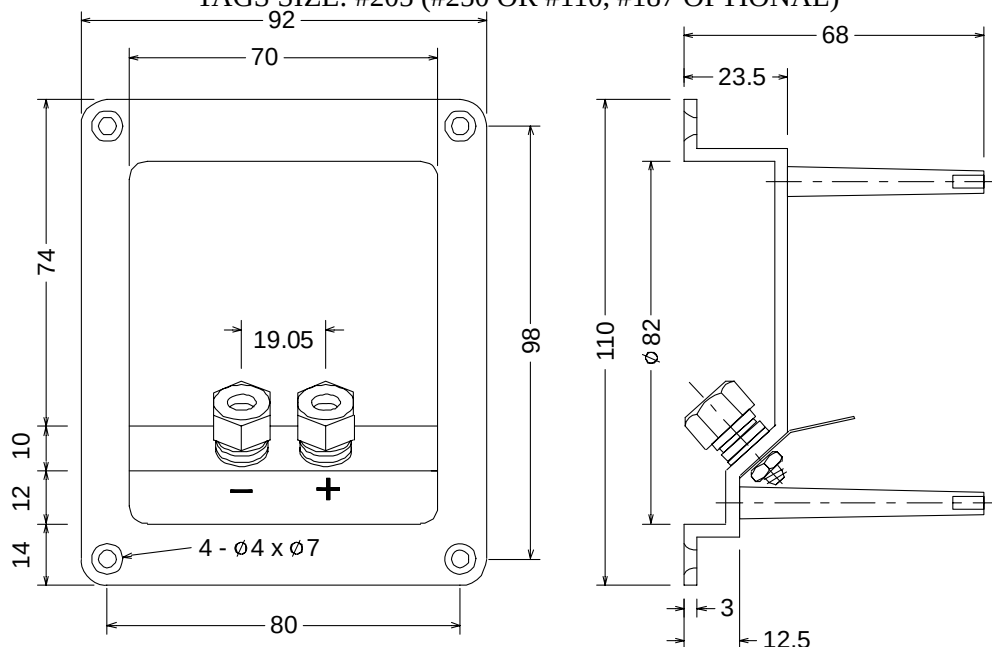



TERMINALS - RPT-26 BI-WIRING SERIES

FEATURES: ** ROUND TYPE (O.D 132mm)


** FIT 4mm BANANA JACK OR 5mm CABLE HOLE OR 6mm SPADE PLUGS

ORDER (P/N) CODE: P/N : RPT-26 - G C U S L CG - G
 DIGIT : 1 2 3 4 5 6 7 8

- 1: RPT-26 : BENNIC RPT-26 SERIES BI-WIRING TERMINAL
- 2: G-18K GOLD-PLATING B/POST., N-NICKEL PLATING B/POST
- 3: A - USE BP10A (PLASTIC CAPS, W/I INSERT THREAD) B/POST
C - USE BP18 (COPPER CAPS, DIA. 12mm) SOLID B/POST
D - USE BP19 (COPPER CAPS, DIA. 15mm) SOLID B/POST
F - USE BP21 (COPPER CAPS, HEX. 14mm) SOLID B/POST
H - USE BP17 (PUSH & RELEASE TYPE) SOLID B/POST
R - USE BP22 (PUSH & RELEASE TYPE) SOLID B/POST
J - USE BP12A (COPPER UNSCREW CAPS, DIA. 14mm) SOLID B/POST
E - USE BP16 (FULLY TRANSPARENT INSULATION) SOLID B/POST
O - USE BP11 (COPPER UNSCREW CAPS, DIA. 12mm)
P - USE BP12 (COPPER UNSCREW CAPS, DIA. 14mm) SOLID B/POST
Q - USE BP13 (COPPER UNSCREW CAPS, HEX. 13mm) SOLID B/POST
NIL - USE BP-10 (PLASTIC CAPS W/O INSERT THREAD) B/POST
- 4: U - SOLID B/POST BP-18, BP-19, OR BP-21 USE "U" TYPE
UR410 (TO ACCEPT 6mm SPADE PLUG) POST.
NIL - USE STANDARD R410 POST
- 5: S - W/I GASKET. , NIL - W/O GASKET
- 6: L -W/I 4 LEGS FOR FIT PCB. , NIL - W/O LEGS
- 7: CG : 1mm BRASS G/P STRAPS FG: 1mm STEEL G/P STRAPS
CG1 : 0.6mm BRASS G/P STRAPS FN: 1mm STEEL N/P STRAPS
** CG 1mm G/P STRAPS WITH POLISHED SURFACE
- 8: G - HARDWARE (TAGS, NUT & WASHER) AT GOLD PLATING,
NIL - HARDWARE AT NICKEL OR TIN PLATING

DIMENSION (mm): ** CAPS COLOR: RED FOR "+", BLACK FOR "-"

** TAGS SIZE: #205 (#250 OR #110, #187 OPTIONAL)

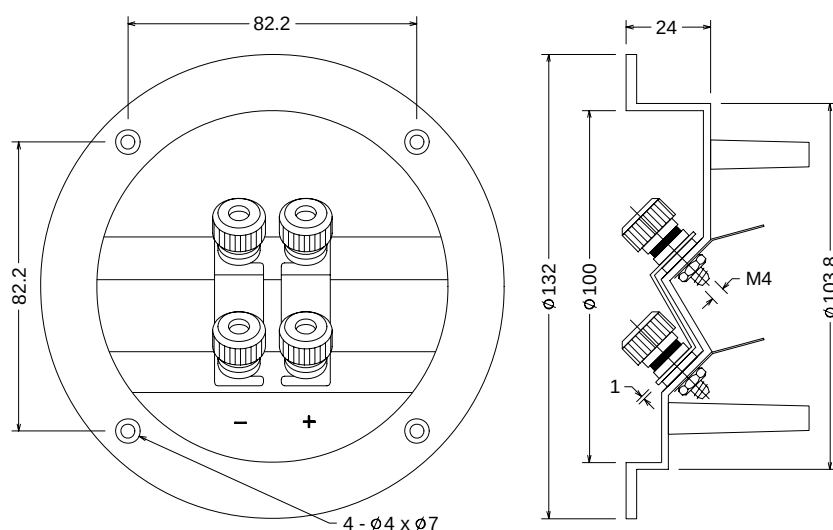




TERMINALS - SPT-26 BI-WIRING SERIES

FEATURES: ** SQUARE SHARP ROUND BOWL - SIZE 116mm x 116mm
** FIT 4mm BANANA JACK OR 5mm CABLE HOLE OR 6mm SPADE PLUGS

ORDER (P/N) CODE: P/N : SPT-26 - G C U S L CG - G
 DIGIT : 1 2 3 4 5 6 7 8

- 1: SPT-26 : BENNIC SPT-26 SERIES BI-WIRING TERMINAL
 - 2: G - 18K GOLD-PLATING B/POST., N-NICKEL PLATING B/POST
 - 3: A - USE BP10A (PLASTIC CAPS, W/I INSERT THREAD) B/POST
C - USE BP18 (COPPER CAPS, DIA. 12mm) SOLID B/POST
D - USE BP19 (COPPER CAPS, DIA. 15mm) SOLID B/POST
F - USE BP21 (COPPER CAPS, HEX. 14mm) SOLID B/POST
H - USE BP17 (PUSH & RELEASE TYPE) SOLID B/POST
R - USE BP22 (PUSH & RELEASE TYPE) SOLID B/POST
J - USE BP12A (COPPER UNSCREW CAPS, DIA. 14mm) SOLID B/POST
E - USE BP16 (FULLY TRANSPARENT INSULATION) SOLID B/POST
O - USE BP11 (COPPER UNSCREW CAPS, DIA. 12mm)
P - USE BP12 (COPPER UNSCREW CAPS, DIA. 14mm) SOLID B/POST
Q - USE BP13 (COPPER UNSCREW CAPS, HEX. 13mm) SOLID B/POST
NIL - USE BP-10 (PLASTIC CAPS W/O INSERT THREAD) B/POST
 - 4: U - SOLID B/POST BP-18, BP-19, OR BP-21 USE "U" TYPE
UR410 (TO ACCEPT 6mm SPADE PLUG) POST.
NIL - USE STANDARD R410 POST
 - 5: S - W/I GASKET. , NIL - W/O GASKET
 - 6: L -W/I LEGS FOR FIT PCB. , NIL - W/O LEGS
 - 7: CG : 1mm BRASS G/P STRAPS FG: 1mm STEEL G/P STRAPS
CG1 : 0.6mm BRASS G/P STRAPS FN: 1mm STEEL N/P STRAPS
** CG 1mm G/P STRAPS WITH POLISHED SURFACE
 - 8: G - HARDWARE (TAGS, NUT & WASHER) AT GOLD PLATING,
NIL - HARDWARE AT NICKEL OR TIN PLATING
- DIMENSION (mm):** ** CAPS COLOR: RED FOR "+", BLACK FOR "-"
** TAGS SIZE: #205 (#250 OR #110, #187 OPTIONAL)

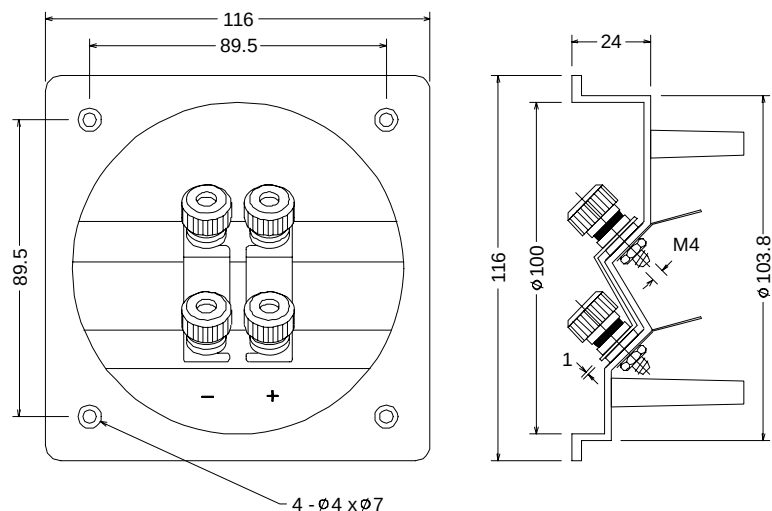




TERMINALS - TPT-20 BI-WIRING SERIES

FEATURES: ** RECTANGLE SHARP - STANDARD SIZE (93mm x 120mm)
 ** FIT 4mm BANANA JACK OR 5mm CABLE HOLE OR 6mm SPADE PLUGS

ORDER (P/N) CODE: P/N : TPT-20 - G C U S L CG - G
 DIGIT : 1 2 3 4 5 6 7 8

- 1: TPT-20 : BENNIC TPT-20 SERIES BI-WIRING TERMINAL
- 2: G - 18K GOLD-PLATING B/POST., N-NICKEL PLATING B/POST
- 3: A - USE BP10A (PLASTIC CAPS, W/I INSERT THREAD) B/POST
 C - USE BP18 (COPPER CAPS, DIA. 12mm) SOLID B/POST
 D - USE BP19 (COPPER CAPS, DIA. 15mm) SOLID B/POST
 F - USE BP21 (COPPER CAPS, HEX. 14mm) SOLID B/POST
 H - USE BP17 (PUSH & RELEASE TYPE) SOLID B/POST
 R - USE BP22 (PUSH & RELEASE TYPE) SOLID B/POST
 J - USE BP12A (COPPER UNSCREW CAPS, DIA. 14mm) SOLID B/POST
 E - USE BP16 (FULLY TRANSPARENT INSULATION) SOLID B/POST
 O - USE BP11 (COPPER UNSCREW CAPS, DIA. 12mm)
 P - USE BP12 (COPPER UNSCREW CAPS, DIA. 14mm) SOLID B/POST
 Q - USE BP13 (COPPER UNSCREW CAPS, HEX. 13mm) SOLID B/POST
 NIL - USE BP-10 (PLASTIC CAPS W/O INSERT THREAD) B/POST
- 4: U - SOLID B/POST BP-18, BP-19, OR BP-21 USE "U" TYPE
 UR410 (TO ACCEPT 6mm SPADE PLUG) POST.
 NIL - USE STANDARD R410 POST
- 5: S - W/I GASKET. , NIL - W/O GASKET
- 6: L - W/I 4 LEGS FOR FIT PCB. , NIL - W/O LEGS
- 7: CG : 1mm BRASS G/P STRAPS , FG: 1mm STEEL G/P STRAPS
 CG1 : 0.5mm BRASS G/P STRAPS , FN: 1mm STEEL N/P STRAPS
 ** CG 1.0mm G/P STRAPS WITH POLISHED SURFACE
- 8: G - HARDWARE (TAGS, NUT & WASHER) AT GOLD PLATING,
 NIL - HARDWARE AT NICKEL OR TIN PLATING

DIMENSION (mm): ** CAPS COLOR: RED FOR "+", BLACK FOR "-"
 ** TAGS SIZE: #205 (#250 OR #110, #187 OPTIONAL)
 ** B/POST SPECIAL PITCHED AT 30mm ALSO ACCEPTABLE

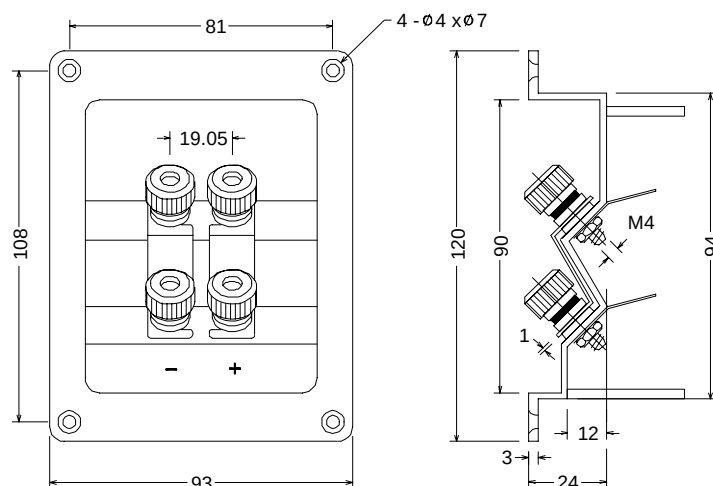


**TERMINALS - TPT-25 BI-WIRING SERIES**

FEATURES: ** RECTANGLE SHARP - STANDARD SIZE (92mm x 110mm)
 ** FIT 4mm BANANA JACK OR 5mm CABLE HOLE OR 6mm SPADE PLUGS

ORDER (P/N) CODE: P/N : TPT-25 - G C U S L CG - G
 DIGIT : 1 2 3 4 5 6 7 8

- 1: TPT-25 : BENNIC TPT-25 SERIES BI-WIRING TERMINAL
- 2: G - 18K GOLD-PLATING B/POST. , N - NICKEL PLATING B/POST
- 3: A - USE BP10A (PLASTIC CAPS, W/I INSERT THREAD) B/POST
 C - USE BP18 (COPPER CAPS, DIA. 12mm) SOLID B/POST
 D - USE BP19 (COPPER CAPS, DIA. 15mm) SOLID B/POST
 F - USE BP21 (COPPER CAPS, HEX. 14mm) SOLID B/POST
 H - USE BP17 (PUSH & RELEASE TYPE) SOLID B/POST
 R - USE BP22 (PUSH & RELEASE TYPE) SOLID B/POST
 J - USE BP12A (COPPER UNSCREW CAPS, DIA. 14mm) SOLID B/POST
 E - USE BP16 (FULLY TRANSPARENT INSULATION) SOLID B/POST
 O - USE BP11 (COPPER UNSCREW CAPS, DIA. 12mm)
 P - USE BP12 (COPPER UNSCREW CAPS, DIA. 14mm) SOLID B/POST
 Q - USE BP13 (COPPER UNSCREW CAPS, HEX. 13mm) SOLID B/POST
 NIL - USE BP-10 (PLASTIC CAPS W/O INSERT THREAD) B/POST
- 4: U - SOLID B/POST BP-18, BP-19, OR BP-21 USE "U" TYPE
 UR410 (TO ACCEPT 6mm SPADE PLUG) POST.
 NIL - USE STANDARD R410 POST
- 5: S - W/I GASKET., NIL - W/O GASKET
- 6: L - W/I 4 LEGS FOR FIT PCB., NIL - W/O LEGS
- 7: CG : 0.5mm BRASS G/P STRAPS
 CN: 0.5mm BRASS N/P STRAPS
- 8: G - HARDWARE (TAGS, NUT & WASHER) AT GOLD PLATING,
 NIL - HARDWARE AT NICKEL OR TIN PLATING

DIMENSION (mm): ** CAPS COLOR: RED FOR "+", BLACK FOR "-"
 ** TAGS SIZE: #205 (#250 OR #110, #187 OPTIONAL)

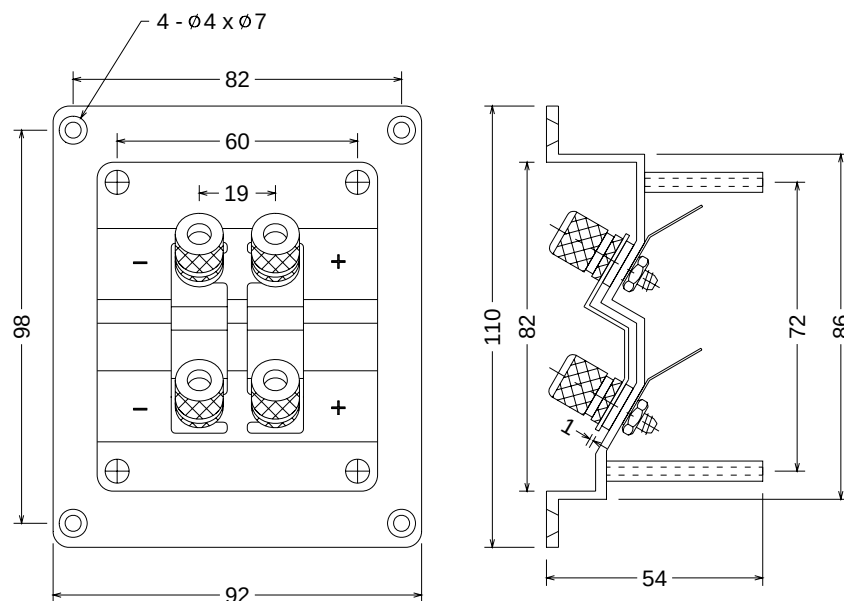




TERMINALS - TPT-30 TRI-WIRING SERIES

FEATURES: ** RECTANGLE SHARP - STANDARD SIZE (100mm x 140mm)
 ** FIT 4mm BANANA JACK OR 5mm CABLE HOLE OR 6mm SPADE PLUGS

ORDER (P/N) CODE: P/N : TPT-30 - G C U S L CG - G
 DIGIT : 1 2 3 4 5 6 7 8




- 1: TPT-30 : BENNIC TPT-30 SERIES TRI-WIRING TERMINAL
- 2: G - 18K GOLD-PLATING B/POST., N-NICKEL PLATING B/POST
- 3: A - USE BP10A (PLASTIC CAPS, W/I INSERT THREAD) B/POST
 C - USE BP18 (COPPER CAPS, DIA. 12mm) SOLID B/POST
 D - USE BP19 (COPPER CAPS, DIA. 15mm) SOLID B/POST
 F - USE BP21 (COPPER CAPS, HEX. 14mm) SOLID B/POST
 H - USE BP17 (PUSH & RELEASE TYPE) SOLID B/POST
 R - USE BP22 (PUSH & RELEASE TYPE) SOLID B/POST
 J - USE BP12A (COPPER UNSCREW CAPS, DIA. 14mm) SOLID B/POST
 E - USE BP16 (FULLY TRANSPARENT INSULATION) SOLID B/POST
 O - USE BP11 (COPPER UNSCREW CAPS, DIA. 12mm)
 P - USE BP12 (COPPER UNSCREW CAPS, DIA. 14mm) SOLID B/POST
 Q - USE BP13 (COPPER UNSCREW CAPS, HEX. 13mm) SOLID B/POST
 NIL - USE BP-10 (PLASTIC CAPS W/O INSERT THREAD) B/POST
- 4: U - SOLID B/POST BP-18, BP-19, OR BP-21 USE "U" TYPE
 UR410 (TO ACCEPT 6mm SPADE PLUG) POST.
 NIL - USE STANDARD R410 POST
- 5: S - W/I GASKET. , NIL - W/O GASKET
- 6: L - W/I 6 LEGS FOR FIT PCB., NIL - W/O LEGS
- 7: CG : 1mm BRASS G/P STRAPS FG: 1mm STEEL G/P STRAPS
 CG1 : 0.5mm BRASS G/P STRAPS FN: 1mm STEEL N/P STRAPS
 ** CG 1.0mm G/P STRAPS WITH POLISHED SURFACE
- 8: G - HARDWARE (TAGS, NUT & WASHER) AT GOLD PLATING,
 NIL - HARDWARE AT NICKEL OR TIN PLATING

DIMENSION (mm): ** CAPS COLOR: RED FOR "+", BLACK FOR "-"
 ** TAGS SIZE: #205 (#250 OR #110, #187 OPTIONAL)



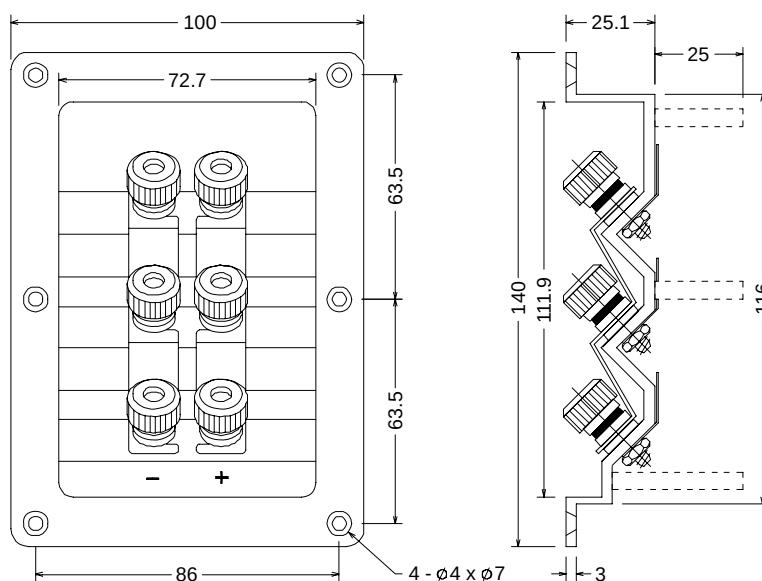







PIN JACK

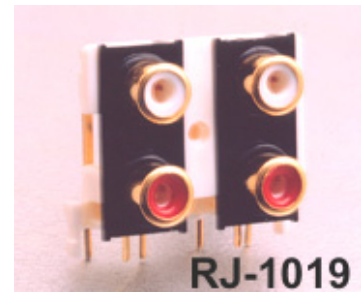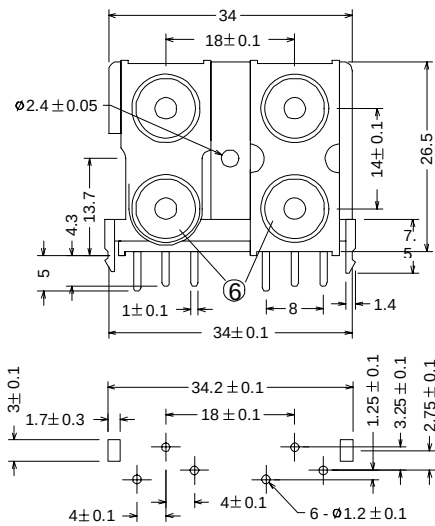

MODEL NO.	RJ-1019-010		RJ-1019-020		RJ-1019-030		RJ-1019-040	
COLOR	A	RED	A	BLACK	A	RED	A	WHITE
	B	WHITE	B	BLACK	B	BLACK	B	RED
SCHEMATIC								

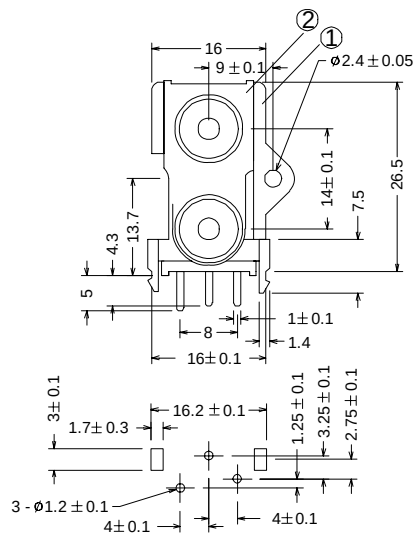

MODEL NO.	RJ-1020-010		RJ-1020-020		RJ-1020-030		RJ-1020-040	
COLOR	A	RED	A	BLACK	A	RED	A	WHITE
	B	WHITE	B	BLACK	B	BLACK	B	RED
SCHEMATIC								

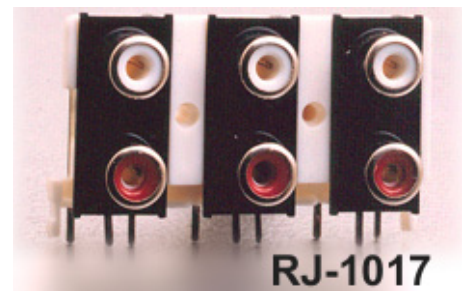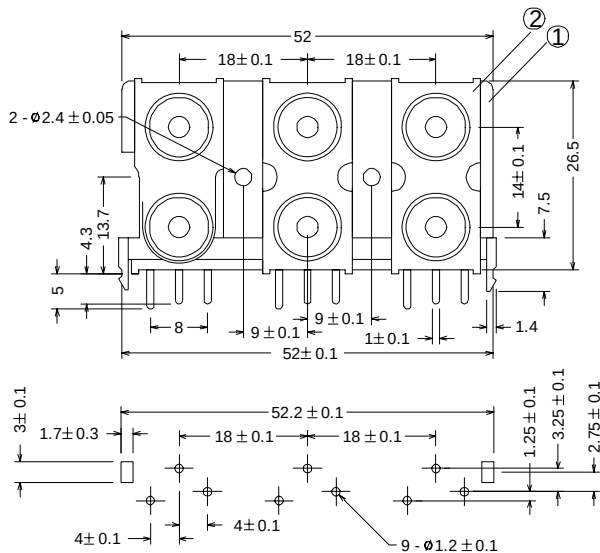

MODEL NO.	RJ-1017-010		RJ-1017-020		RJ-1017-030		RJ-1017-040	
COLOR	A	RED	A	BLACK	A	RED	A	WHITE
	B	WHITE	B	BLACK	B	BLACK	B	RED
SCHEMATIC								